

RK-EU-DL01

Downlights




DESCRIPTION: Recessed mounted LED downlight Light
distribution type: direct
Optical system: lenses, mirror metallic reflector
Housing: aluminium
Colour: white, RAL9016

GENERAL DATA: Mains voltage: 220-240V, 50-60Hz
LED lifetime, h: 50000/L80B10
SDCM: 3
Protection class IEC: II
Ingress protection code: IP20
Mechanical impact resistance: IK02
Operating temperature range, °C: ta -10...+40

INSTALLATION: In ceilings with cut-out openings (mounting brackets included). Installation in metal ceiling grid. Cable, 0.15m, 2x0.75mm²

ENVIRONMENT: Indoor

APPLICATION: Office, education, hotel, corridor, showroom, exhibition, public place

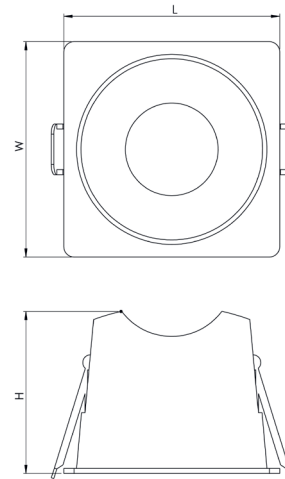


PRODUCT	LENGTH, mm	WIDTH, mm	HEIGHT, mm	CUT-OUT, mm	LUMINAIRE OUTPUT*, lm	SYSTEM POWER*, W	SYSTEM EFFICACY*, lm/W	CRI	CCT*, K	WEIGHT, kg
RK-EU-DL01 1x1200 J834 T840 L55 MGC	85	85	64	d75	1187	9,7	122	80+	4000	0,2
RK-EU-DL01 1x1200 J834 T840 L36 MGC	85	85	64	d75	1186	9,7	122	80+	4000	0,2

*Tolerance range for optical and electrical data: -10%. Values apply to an ambient temperature of 25°C. RIKADA is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification

OPTIONS AVAILABLE ON REQUEST:

LED	REFLECTOR AND OPTICS	CONTROL GEAR
T830	L36	DALI
T840	MGC	
	MMC	
	WMC	
	BMC	

MGC L55



MGC L36

