

RK-EU-HB03

High-bays




DESCRIPTION: Surface mounted or suspended high-bay LED luminaire for use in low temperatures -35°C environments
Light distribution type: direct
Optical system: lenses, siliconerubber gasket, impact resistance
Housing: aluminium
Colour: white, RAL9003

GENERAL DATA: Mains voltage: 220-240V, 0/50-60Hz
LED lifetime, h: 100000/L80B10
SDCM: 3
Protection class IEC: I
Ingress protection code: IP65 Mechanical impact resistance: IK08 Protection symbol: D
Operating temperature range, °C: ta -35...+35°C

INSTALLATION: On the ceiling or suspended. Cable 2.0m, 3x1.5mm²

ENVIRONMENT: Indoor

APPLICATION: Cold storage, industry, warehouse, transport terminal

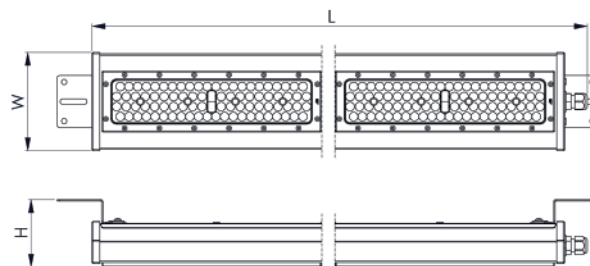

PRODUCT	LENGTH, mm	WIDTH, mm	HEIGHT, mm	LUMINAIRE OUTPUT*, lm	SYSTEM POWER*, W	SYSTEM EFFICACY*, lm/W	CRI	CCT*, K	WEIGHT, kg
RK-EU-HB03 1x10700 G331 T840 L75 CBF3-2.0m Tmin-35	554	114	80	10237	61,2	167	80+	4000	1,8
RK-EU-HB03 1x16050 G332 T840 L75 CBF3-2.0m Tmin-35	807	114	80	15355	89,8	171	80+	4000	2,0
RK-EU-HB03 1x21400 G333 T840 L75 CBF3-2.0m Tmin-35	1060	114	80	20474	117,2	175	80+	4000	2,4

*Tolerance range for optical and electrical data: -10%. Values apply to an ambient temperature of 25°C. RIKADA is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification

AVAILABLE ACCESSORIES:



Product: Suspension MTG KIT - RK-EU-HB02 1.5m
Description: kit for RK-EU-HB02 highbay, 1.5 meter

Product: Suspension MTG KIT - RK-EU-HB02 3.0m
Description: Suspension for highbay, RK-EU-HB02 3.0 meter

Product: Suspension MTG KIT - RK-EU-HB02 5.0m
Description: Suspension for highbay, RK-EU-HB02 5.0 meter




Product: Wire suspension BRACKETS - RK-EU-HB02
Description: Wire suspension brackets for RK-EU-HB02 highbay, 2pcs


OPTIONS AVAILABLE ON REQUEST:

LED	REFLECTOR AND OPTICS	CONTROL GEAR
T830	L30x65	DALI
T840	L40	COR
T857	L60	COR1min
T865	L75	COR30min
	L90x90	
	L120	


L30x65




L40




L60



L75



L90x90



L120

