



RK-EU-SPT05

Spotlights



DESCRIPTION:	Recessed mounted LED downlight Light distribution type: direct Optical system: lens, 40°, tilt adjustable Housing: die cast aluminium Colour: white, RAL9003 Fire rated 30, 60 and 90 min
GENERAL DATA:	Mains voltage: 220-240V, 50-60Hz LED lifetime, h: 40000/L70B50 SDCM: 5 Protection class IEC: II Ingress protection code: IP44 Mechanical impact resistance: IK04 Operating temperature range, °C: ta -10...+40
INSTALLATION:	In ceilings with cut-out openings (mounting brackets included). Push-in terminal, 2x1x1mm ²
ENVIRONMENT:	Indoor
APPLICATION:	Office, education, hotel, corridor, bathroom, showroom, exhibition, public place

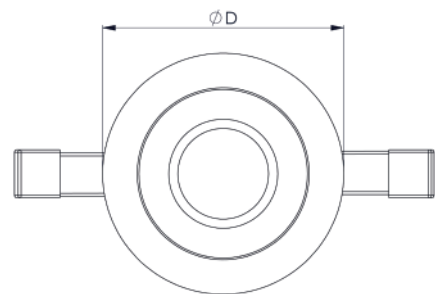

PRODUCT	DIAMETER, mm	HEIGHT, mm	CUT-OUT, mm	LUMINAIRE OUTPUT*, lm	SYSTEM POWER*, W	SYSTEM EFFICACY*, lm/W	CRI	CCT*, K	WEIGHT, kg
RK-EU-SPT05 1x700 G682 T840	96	56	80	850	8,5	100	80+	4000	0,4

*Tolerance range for optical and electrical data: -10%. Values apply to an ambient temperature of 25°C. RIKADA is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification

OPTIONS AVAILABLE ON REQUEST:

LED	CONTROL GEAR	COLOUR
T830	DALI	RAL
T840	TDIM	

STANDARD

