

RK-EU-DS04

Diffused Surface Lights




DESCRIPTION: Surface mounted plastic LED luminaire
Light distribution type: direct
Optical system: opal acrylic diffuser, UV resistant
Housing: thermoplastic
Colour: white; dark grey; black

GENERAL DATA: Mains voltage: 220-240V, 50-60Hz
LED lifetime, h: 50000/L80B10
SDCM: 3
Protection class IEC: II
Ingress protection code: IP65
Mechanical impact resistance: IK08
Operating temperature range, °C: ta -15...+35
 (from 0°C with EM3)

INSTALLATION: On the ceiling or wall. Push-in terminal, 2x2x2.5mm²
 (Screw terminal, 2x1.5mm² for E27 version)

ENVIRONMENT: Indoor/outdoor with roof

APPLICATION: Office, education, hotel, corridor, staircase,
 healthcare, bathroom, public place, parking area

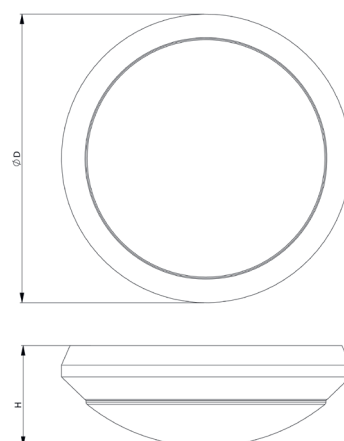

PRODUCT	DIAMETER, mm	HEIGHT, mm	LUMINAIRE OUTPUT*, lm	SYSTEM POWER*, W	SYSTEM EFFICACY*, lm/W	CRI	CCT*, K	WEIGHT, kg
RK-EU-DS04 1E27 T80 1G	295	100						1,0
RK-EU-DS04 1x1200 D501 T840 1G	295	100	1102	9,3	119	80+	4000	1,1
RK-EU-DS04 1x1650 D502 T840 1G	295	100	1539	13,5	114	80+	4000	1,1
RK-EU-DS04 1E27 T80 LOUVER	295	100						1,0
RK-EU-DS04 1x1200 D501 T840 LOUVER	295	100	648	9,3	70	80+	4000	1,1
RK-EU-DS04 1x1650 D502 T840 LOUVER	295	100	906	13,5	67	80+	4000	1,1
RK-EU-DS04 1E27 T80 DGREY	295	100						1,0
RK-EU-DS04 1x1200 D501 T840 DGREY	295	100	1102	9,3	119	80+	4000	1,1
RK-EU-DS04 1x1650 D502 T840 DGREY	295	100	1539	13,5	114	80+	4000	1,1
RK-EU-DS04 1E27 T80 LOUVER DGREY	295	100						1,0
RK-EU-DS04 1x1200 D501 T840 LOUVER DGREY	295	100	648	9,3	70	80+	4000	1,1
RK-EU-DS04 1x1650 D502 T840 LOUVER DGREY	295	100	906	13,5	67	80+	4000	1,1

*Tolerance range for optical and electrical data : -10%. Values apply to an ambient temperature of 25°C. RIKADA is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification


OPTIONS AVAILABLE ON REQUEST:

LED	COVERS	CONTROL GEAR	SENSORS	EMERGENCY
T830	LOUVER	DALI ¹	MW	EM3 ²
T840		BLT	MWRFM+	EM3A ²
		KRBLT	MW DALI2	EM3D ²
		KRBLT DALI	MW KRBLT	
			MW KRBLT DALI	

1 For this model DALI option is not compatible with SWITCHDIM functionality

2 Operating temperature range for Luminaires with EM option, °C: ta 0... +35

STANDARD



LOUVER

