



RK-EU-FL08

Floodlights




DESCRIPTION: Wall-mounted accent LED luminaire
Light distribution type: direct
Optical system: lenses, tempered glass diffuser
Housing: aluminium
Colour: grey, RAL9023

GENERAL DATA: Mains voltage: 220-240V, 50-60Hz
LED lifetime, h: 50000/L80B50
SDCM: 5
Protection class IEC: I
Ingress protection code: IP66
Mechanical impact resistance: IK08
Operating temperature range, °C: ta -25...+40

INSTALLATION: On the horizontal or vertical surface.
 Cable, 0.5m, 3x1.0mm²

ENVIRONMENT: Outdoor

APPLICATION: Facade illumination

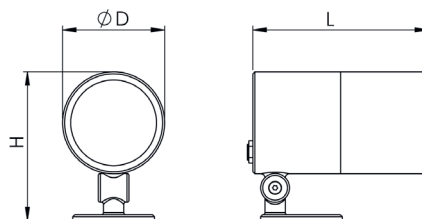

PRODUCT	LENGTH, mm	DIAMETER, mm	HEIGHT, mm	LUMINAIRE OUTPUT*, lm	SYSTEM POWER*, W	SYSTEM EFFICACY*, lm/W	CRI	CCT*, K	WEIGHT, kg
RK-EU-FL08 1x850 J784 T840 L30	86	50	81	832	10,0	83	80+	4000	0,4

*Tolerance range for optical and electrical data: -10%. Values apply to an ambient temperature of 25°C. RIKADA is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification

AVAILABLE ACCESSORIES:




Product: Spike - Comet S LED
Description: Ground spike


OPTIONS AVAILABLE ON REQUEST:

LED	REFLECTOR AND OPTICS
T830	L2
T840	L6
	L12
	L30
	L10x70


L2




L6



L12



L30



L10x70

