

RK-EU-SPT08

Spotlights





DESCRIPTION: Recessed mounted LED spotlight with narrow trim
Light distribution type: direct
Optical system: faceted aluminium reflector, clear PMMA diffuser, narrow trim
Housing: aluminium
Colour: white, RAL9016

GENERAL DATA: Mains voltage: 220-240V, 0/50-60Hz
LED lifetime, h: 60000/L80B10
SDCM: 3
Protection class IEC: II
Ingress protection code: IP20
Mechanical impact resistance: IK02
Operating temperature range, °C: ta 0...+35

INSTALLATION: In ceilings with cut-out openings (mounting brackets included). Push-in terminal, 2x1x1.5 mm²

ENVIRONMENT: Indoor

APPLICATION: Retail, showroom, exhibition, public place

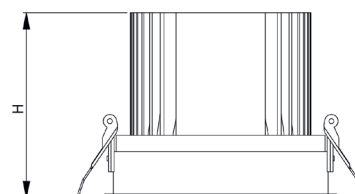


PRODUCT	DIAMETER, mm	HEIGHT, mm	CUT-OUT, mm	LUMINAIRE OUTPUT*, lm	SYSTEM POWER*, W	SYSTEM EFFICACY*, lm/W	CRI	CCT*, K	WEIGHT, kg
RK-EU-SPT08 1x1950 E838 T840 R40	139	117	130	1946	13,5	144	80+	4000	1,4
RK-EU-SPT08 1x2600 E839 T840 R40	139	117	130	2644	18,7	141	80+	4000	1,4
RK-EU-SPT08 1x3400 E840 T840 R40	139	117	130	3559	26,5	134	80+	4000	1,4
RK-EU-SPT08 1x4300 J194 T840 R40	139	117	130	4464	35,1	127	80+	4000	1,5
RK-EU-SPT08 1x4850 E841 T840 R40	139	117	130	5099	40,2	127	80+	4000	1,5

*Tolerance range for optical and electrical data: -10%. Values apply to an ambient temperature of 25°C. RIKADA is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification

OPTIONS AVAILABLE ON REQUEST:

LED	REFLECTOR AND OPTICS	CONTROL GEAR	EMERGENCY	CONNECTION	COLOUR
T830	R24	DALI	EM3A	WIE3-0.5m	RAL
T840	R40		EM3D	WIE5D-0.5m	
T930				Europlug-1.5m	
T940				Europlug-3.0m	
T927 NATURAL					
T930 NATURAL					
T940 NATURAL					

R24



R40

