

RK-EU-LNR08

Linear Lights




DESCRIPTION: Surface mounted or suspended LED luminaire
Light distribution type: direct
Optical system: opal polycarbonate diffuser / matt micro-prismatic polycarbonate diffuser, low glare
Housing: aluminium
Colour: light grey, RAL9006S; white, RAL9003S; black, RAL9005S

GENERAL DATA: Mains voltage: 220-240V, 0/50-60Hz
LED lifetime, h: 100000/L80B10, basic version: 50000/L80B10
SDCM: 3
Protection class IEC: I
Ingress protection code: IP40
Mechanical impact resistance: IK05
Glow wire test, °C: 850
Operating temperature range, °C: ta -15...+35

INSTALLATION: On the ceiling or suspended (wire, cable and cap to be ordered separately), with L/LL option is designed for in-line connection. Through wired, 3x1.5mm², push-in terminal 3x2x2.5mm² and supply cord

ENVIRONMENT: Indoor

APPLICATION: Office, education, hotel, corridor, retail, public place

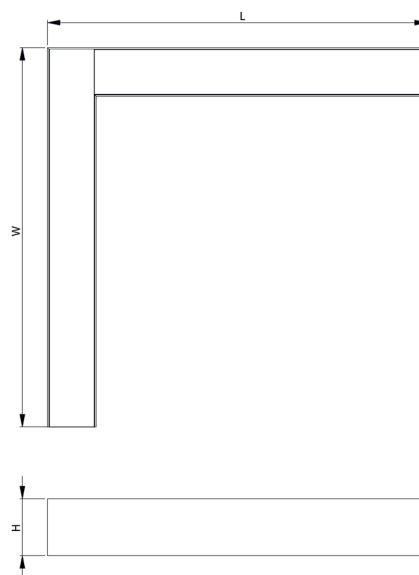

PRODUCT	LENGTH, mm	WIDTH, mm	HEIGHT, mm	LUMINAIRE OUTPUT*, lm	SYSTEM POWER*, W	SYSTEM EFFICACY*, lm/W	CRI	CCT*, K	WEIGHT, kg
RK-EU-LNR08 1x1300 K121 T840 OP LO1 1LIN LL	455	455	69	1295	10,1	128	80+	4000	1,9
RK-EU-LNR08 1x1800 K122 T840 OP LO2 1LIN LL	455	455	69	1783	14	127	80+	4000	1,9
RK-EU-LNR08 1x2500 K123 T840 OP LO3 1LIN LL	455	455	69	2493	20,2	123	80+	4000	1,9
RK-EU-LNR08 1x3750 K124 T840 OP LO4 1LIN LL	455	455	69	3739	29,2	128	80+	4000	1,9
RK-EU-LNR08 1x1150 H301 T840 OP LO1 1LIN LL	455	455	69	1145	10	115	80+	4000	1,9
RK-EU-LNR08 1x1600 H302 T840 OP LO2 1LIN LL	455	455	69	1559	14	111	80+	4000	1,9
RK-EU-LNR08 1x2150 H303 T840 OP LO3 1LIN LL	455	455	69	2144	20,2	106	80+	4000	1,9
RK-EU-LNR08 1x3250 H304 T840 OP LO4 1LIN LL	455	455	69	3215	29,3	110	80+	4000	1,9

*Tolerance range for optical and electrical data: -10%. Values apply to an ambient temperature of 25°C. RIKADA is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification

AVAILABLE ACCESSORIES:



Product: Suspension MTG KIT SUSI
Description: Suspension wire set "I" type, 1.5m adjustable, 1pcs
**note - 1pcs MTG SUSI KIT for corner luminaire*
**note - SUS option is required*



Product: CAP cable clip D6.3mm SET clear
Description: Cable and suspension wire clip set, 4pcs. For cable diameter up to 6,3mm and wire diameter 1mm



Product: CAP cable 3x0.75 2.0m clear
Description: Cable 3x0.75mm² for suspended luminaire up to 2.0 meters, transparent



Product: CAP4, light grey/ white/ black
Description: Square decorative metal cap for hiding cable inlet with suspension wire attachment point, push-in terminals 3x1x1.5mm², light grey/ white/ black

Product: CAP5, light grey/ white/ black
Description: Square decorative metal cap for hiding cable inlet with suspension wire attachment point, push-in terminals 5x1x1.5mm², light grey/ white/ black

OPTIONS AVAILABLE ON REQUEST:

LED	REFLECTOR AND OPTICS	CONTROL GEAR	CONNECTION	OTHER	COLOUR
T830	OP	DALI ¹	1LIN	LL ⁵	RAL
T840	DPRZ LT80	BLT	2LIN	SUS ⁴	
		KRBLT	3LIN		
		KRBLT DALI	2G		
		TW ²	CBF3-2.0m clear ⁴		

1 For DALI LIN option wires are 2x0.5mm²


2 Ask for special models with option TW

3 For L and LL models joint kit and 1LIN option included

4 For suspended luminaires it is recommended to use one of CBF option for easier mounting

5 For L and LL models joint kit and 1LIN option included

OP



DPRZ LT80

