

RK-EU-AC08

Acoustic luminaires




DESCRIPTION: Surface or suspended decorative LED luminaire
Light distribution type: direct **Optical system:** thermoplastic diffuser
Housing: steel
Colour: white, RAL9003S

GENERAL DATA: Mains voltage: 220-240V, 0/50-60Hz / 50-60Hz
LED lifetime, h: 50000/L80B10
SDCM: 3
Protection class IEC: I
Ingress protection code: IP40
Mechanical impact resistance: IK02
Operating temperature range, °C: ta 0...+35

INSTALLATION: On the ceiling or suspended (accessories be ordered separately).
 Push-in terminal, 3x2x2.5mm²

ENVIRONMENT: Indoor

APPLICATION: Office, retail, public place

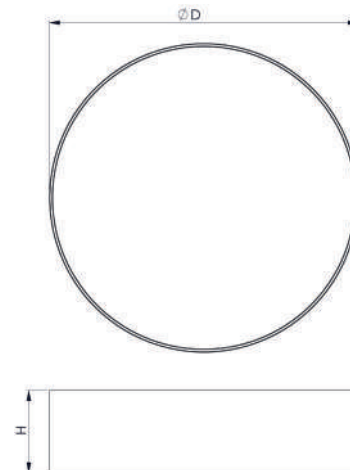

PRODUCT	DIAMETER, mm	HEIGHT, mm	LUMINAIRE OUTPUT*, lm	SYSTEM POWER*, W	SYSTEM EFFICACY*, lm/W	CRI	CCT*, K	WEIGHT, kg
RK-EU-AC08 1x1700 J682 T840 T17	300	150	1703	18,1	94	80+	4000	1,8
RK-EU-AC08 1x1500 J683 T840 T17	300	250	1467	18,1	81	80+	4000	1,8
RK-EU-AC08 1x1350 J684 T840 T17	300	400	1205	18,1	67	80+	4000	2,3
RK-EU-AC08 1x2500 J685 T840 T17	450	150	2477	25,5	97	80+	4000	2,4
RK-EU-AC08 1x2150 J686 T840 T17	450	250	2134	25,5	84	80+	4000	2,4
RK-EU-AC08 1x1800 J687 T840 T17	450	400	1753	25,5	69	80+	4000	2,9
RK-EU-AC08 1x4650 J688 T840 T17	600	150	4644	47,2	98	80+	4000	2,7
RK-EU-AC08 1x4050 J689 T840 T17	600	250	4001	47,2	85	80+	4000	2,7
RK-EU-AC08 1x3300 J698 T840 T17	600	400	3287	46,7	70	80+	4000	3,2
RK-EU-AC08 1x6700 J888 T840 T17	800	150	6735	67,1	100	80+	4000	5,0
RK-EU-AC08 1x5750 J889 T840 T17	800	250	5735	67,0	86	80+	4000	5,0
RK-EU-AC08 1x4750 J846 T840 T17	800	400	4711	66,2	71	80+	4000	5,0
RK-EU-AC08 1x8700 J699 T840 T17	1000	150	8826	86,5	102	80+	4000	7,2
RK-EU-AC08 1x7500 J700 T840 T17	1000	250	7469	86,3	87	80+	4000	7,2
RK-EU-AC08 1x6150 J701 T840 T17	1000	400	6135	85,3	72	80+	4000	7,7

*Tolerance range for optical and electrical data : -10%. Values apply to an ambient temperature of 25°C. RIKADA is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification

AVAILABLE ACCESSORIES:



Product: Suspension MTG KIT SUSI
Description: Suspension wire set "I" type, 1.5m adjustable, 1pcs
**note - 3pcs MTG KIT SUSI for one fitting required*



Product: CAP cable 3x0.75 2.0m clear
Description: Cable 3x0.75mm² for suspended luminaire up to 2.0 meters, transparent



Product: 3-point Suspension MTG KIT with round cap, white/ light grey/ black
Description: Suspension wire set with round cap 3x"I" type, 1.5m adjustable, white/ light grey/ black, 1pcs



Product: CAP cable clip D6.3mm SET clear
Description: Cable and suspension wire clip set, 4pcs. For cable diameter up to 6,3mm and wire diameter 1mm



Product: CAP4, light grey/ white/ black
Description: Square decorative metal cap for hiding cable inlet with suspension wire attachment point, push-in terminals 3x1x1.5mm², light grey/ white/ black

Product: CAP5, light grey/ white/ black
Description: Square decorative metal cap for hiding cable inlet with suspension wire attachment point, push-in terminals 5x1x1.5mm², light grey/ white/ black

OPTIONS AVAILABLE ON REQUEST:

LED	CONTROL GEAR	CONNECTION	COLOUR
T830	DALI	CBF3-2.0m clear	T...(fabric colour code) ²
T840	EAIRB-S ¹	CBF3-3.0m clear	
	BLT	CBF5-2.0m clear	
	MW	CBF5-3.0m clear	

¹ Max wire length from EAIRB-M to last EAIRB-S - 11 m

² List of material colour is found on page 308