

RK-EU-PL14

Park and Street Lights




DESCRIPTION: Pole-mounted basic LED street luminaire
Light distribution type: direct
Optical system: polycarbonate asymmetric street optics, UV stabilized, impact resistant
Housing: aluminium
Colour: light grey, RAL7042

GENERAL DATA: Mains voltage: 220-240V, 50-60Hz
LED lifetime, h: 50000/L70B50
SDCM: 5
Protection class IEC: I
Ingress protection code: IP65
Mechanical impact resistance: IK08
Operating temperature range, °C: ta -20...+40

INSTALLATION: With two screws on Ø60mm horizontal or vertical pole, on the wall (mounting bracket to be ordered separately). Cable, 0.45m, 3x1.00mm²

ENVIRONMENT: Outdoor

APPLICATION: Parking area, public space

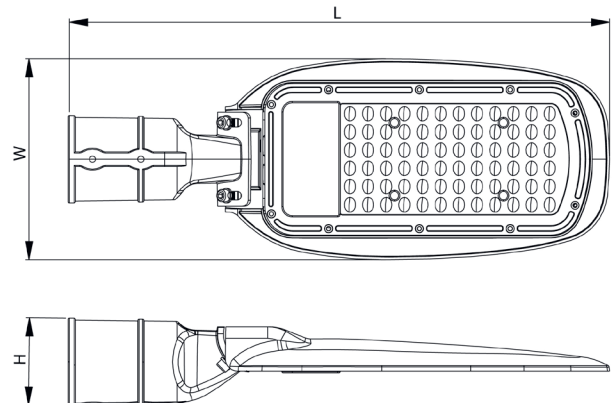

PRODUCT	LENGTH, mm	WIDTH, mm	HEIGHT, mm	LUMINAIRE OUTPUT*, lm	SYSTEM POWER*, W	SYSTEM EFFICACY*, lm/W	CRI	CCT*, K	WEIGHT, kg
RK-EU-PL14 1x3600 H241 T840	447	166	72	3600	30,0	120	80+	4000	1,2
RK-EU-PL14 1x5000 H212 T840	447	166	72	5500	50,0	110	80+	4000	1,0
RK-EU-PL14 1x8400 H242 T840	545	225	72	8400	70,0	120	80+	4000	2,37

*Tolerance range for optical and electrical data: -10%. Values apply to an ambient temperature of 25°C. RIKADA is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification

AVAILABLE ACCESSORIES:



Product: WALL MTG bracket (Street LED D60mm 10° P7042S)
Description: Bracket for street luminaire installation onto wall, pole diameter D60mm, 10° angle, light grey RAL7042S, 1pcs



Product: Power supply connector - IP66/IP68, 3x1.5mm²
Description: Quick and easy to connect power supply and luminaire cables connector - IP66/IP68, 3x1.5mm², 450V/10A, 1pcs

STANDARD

