


RK-EU-BA12

Batten Lights



DESCRIPTION:	Surface mounted or suspended LED luminaire for in-line connection Light distribution type: direct Optical system: lenses Housing: aluminium Colour: white, RAL9003G2
GENERAL DATA:	Mains voltage: 220-240V, 0/50-60Hz LED lifetime, h: 100000/L80B10 SDCM: 3 Protection class IEC: I Ingress protection code: IP65 Mechanical impact resistance: IK08 Operating temperature range, °C: ta 0...+40
INSTALLATION:	Surface mounted or suspended (brackets and I-join kit included with each luminaire). Through wired, 5x2.5mm², two 5-pole plug and socket connectors
ENVIRONMENT:	Indoor
APPLICATION:	Retail, hall, public place

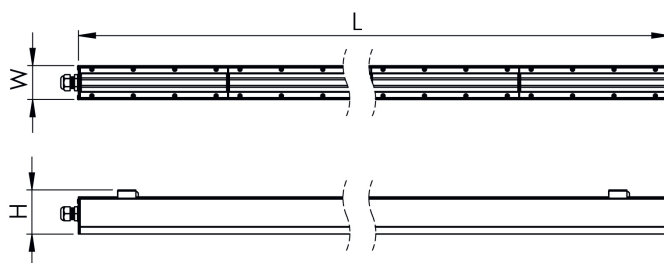

PRODUCT	LENGTH, mm	WIDTH, mm	HEIGHT, mm	LUMINAIRE OUTPUT*, lm	SYSTEM POWER*, W	SYSTEM EFFICACY*, lm/W	CRI	CCT*, K	WEIGHT, kg
RK-EU-BA12 1x5350 J877 T840 LS90x110 LO1 LL	1146	65	86	5318	29,8	178	80+	4000	3,5
RK-EU-BA12 1x6400 J878 T840 LS90x110 LO2 LL	1146	65	86	6351	35,7	178	80+	4000	3,5
RK-EU-BA12 1x7350 J879 T840 LS90x110 LO3 LL	1146	65	86	7322	41,5	176	80+	4000	3,5
RK-EU-BA12 1x6650 K069 T840 LS90x110 LO1 LL	1432	65	86	6650	36,8	181	80+	4000	4,4
RK-EU-BA12 1x7950 K070 T840 LS90x110 LO2 LL	1432	65	86	7939	44,6	178	80+	4000	4,4
RK-EU-BA12 1x9200 K071 T840 LS90x110 LO3 LL	1432	65	86	9153	52,4	175	80+	4000	4,4
RK-EU-BA12 1x9350 K400 T840 LS90x110 LO3 LL	2004	65	86	9310	50,5	184	80+	4000	6,1
RK-EU-BA12 1x11150 K401 T840 LS90x110 LO3 LL	2004	65	86	11115	61,1	182	80+	4000	6,1
RK-EU-BA12 1x12850 K402 T840 LS90x110 LO3 LL	2004	65	86	12814	71,9	178	80+	4000	6,1
RK-EU-BA12 1x13300 K072 T840 LS90x110 LO1 LL	2862	65	86	13300	72,9	182	80+	4000	8,7
RK-EU-BA12 1x15900 K073 T840 LS90x110 LO2 LL	2862	65	86	15878	86,4	184	80+	4000	8,7
RK-EU-BA12 1x18350 K074 T840 LS90x110 LO3 LL	2862	65	86	18306	101,6	180	80+	4000	8,7
BLANK RK-EU-BA12 assembly L1140mm RAL9003									
BLANK RK-EU-BA12 assembly L1425mm RAL9003									
BLANK RK-EU-BA12 assembly L2850mm RAL9003									
BLANK RK-EU-BA12 assembly L1000mm RAL9003 (Custom)									
BLANK RK-EU-BA12 DALI assembly L1140mm RAL9003									
BLANK RK-EU-BA12 DALI assembly L1425mm RAL9003									
BLANK RK-EU-BA12 DALI assembly L2850mm RAL9003									
BLANK RK-EU-BA12 DALI assembly L1000mm RAL9003 (Custom)									

*Tolerance range for optical and electrical data ±10%. Values apply to an ambient temperature of 25°C. RIKADA is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification

AVAILABLE ACCESSORIES:



Product: Suspension MTG KIT SUSI
Description: Suspension wire set "I" type, 1.5m adjustable, 1pcs
**note - 2pcs MTG SUSI KIT for length up to 2000mm, 3pcs MTG SUSI KIT for lengths 2000 -3000mm*



Product: Gear tray removal tool - RK-EU-BA12
Description: A pair of gear tray removal tools for neat tray removal during installation



Product: END CAPS kit - RK-EU-BA12 LL RAL9003
Description: End caps kit for Mizar LED LL luminaires. Including: power supply connector, two end caps with gaskets, cable gland

Product: Power supply socket - L QPS
Description: 7-pole power supply socket 1pcs. IP65

Product: Power supply socket - L QPS - N m
Description: Outgoing flexible cable 5x2.5mm², length according to customer specification
**note - applicable only with L QPS option*

OPTIONS AVAILABLE ON REQUEST:

LED	REFLECTOR AND OPTICS	LIGHT OUTPUT LEVELS	CONTROL GEAR	SENSORS	EMERGENCY	CONNECTION	OTHER	COLOUR
T830	LS30x90	LO1...3	DALI	PIR(BASIC)	EM3A	L1	L	RAL
T840	LS60x110			PIR	EM3D	L2	L QPS	
	LS90x110			PIR DALI ¹	EM3DLER	L3		
	L1A18				EMEXIT ²			
	L2A23							


¹ PIR options are available only with BLANK part

² EM3DLER and EMEXIT options are available only with BLANK part


³ EM3DLER and EMEXIT options are installed in the middle of BLANK RK-EU-BA12

⁴ For option EMEXIT, Helm S or Helm exit signs (with corresponding blade accessory), please order separately


LS30x90




LS60x110



LS90x110



L1A18



L2A23

