

RK-EU-PA16

Recessed Panels




DESCRIPTION: Recessed plaster-in frameless LED luminaire
Light distribution type: direct
Optical system: translucent micro-prismatic PMMA diffuser / opal PMMA diffuser
Housing: steel
Colour: white, RAL9003

GENERAL DATA: Mains voltage: 220-240V, 50-60Hz
LED lifetime, h: 50000/L80B10
SDCM: 3
Protection class IEC: I
Ingress protection code: IP20
Operating temperature range, °C: ta 0...+35

INSTALLATION: In ceilings with cut-out openings (mounting brackets included). Push-in terminal, 3x2x2.5mm²

ENVIRONMENT: Indoor

APPLICATION: Office, education, corridor, retail, public place

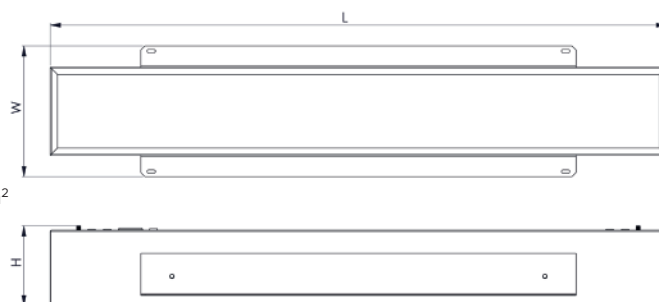


PRODUCT	LENGTH, mm	WIDTH, mm	HEIGHT, mm	CUT-OUT, mm	LUMINAIRE OUTPUT*, lm	SYSTEM POWER*, W	SYSTEM EFFICACY*, lm/W	CRI	CCT*, K	WEIGHT, kg
RK-EU-PA16 1x1100 D720 T840 MPRZ LT92	220	220	65	224x224	1109	10,8	103	80+	4000	1,8
RK-EU-PA16 1x1550 D721 T840 MPRZ LT92	220	220	65	224x224	1549	14,7	105	80+	4000	1,8
RK-EU-PA16 1x1150 D722 T840 MPRZ LT92	595	85	65	599x89	1160	10,1	115	80+	4000	1,8
RK-EU-PA16 1x1550 D723 T840 MPRZ LT92	595	85	65	599x89	1580	13,6	116	80+	4000	1,8
RK-EU-PA16 1x1700 D724 T840 MPRZ LT92	875	85	65	879x89	1740	14,4	121	80+	4000	2,1
RK-EU-PA16 1x2300 D725 T840 MPRZ LT92	875	85	65	879x89	2370	20,5	116	80+	4000	2,1
RK-EU-PA16 1x2250 D726 T840 MPRZ LT92	1155	85	65	1159x89	2319	19,1	121	80+	4000	2,4
RK-EU-PA16 1x3100 D727 T840 MPRZ LT92	1155	85	65	1159x89	3160	25,8	122	80+	4000	2,4
RK-EU-PA16 1x2850 D728 T840 MPRZ LT92	1435	85	65	1439x89	2899	23,9	121	80+	4000	2,8
RK-EU-PA16 1x3850 D990 T840 MPRZ LT92	1435	85	65	1439x89	3950	32,1	123	80+	4000	2,8
RK-EU-PA16 1x1100 D720 T840 OP LT80	220	220	65	224x224	1080	10,8	100	80+	4000	1,8
RK-EU-PA16 1x1550 D721 T840 OP LT80	220	220	65	224x224	1508	14,7	103	80+	4000	1,8
RK-EU-PA16 1x1150 D722 T840 OP LT80	595	85	65	599x89	1129	10,1	112	80+	4000	1,8
RK-EU-PA16 1x1550 D723 T840 OP LT80	595	85	65	599x89	1538	13,6	113	80+	4000	1,8
RK-EU-PA16 1x1700 D724 T840 OP LT80	875	85	65	879x89	1694	14,4	118	80+	4000	2,1
RK-EU-PA16 1x2300 D725 T840 OP LT80	875	85	65	879x89	2307	20,5	113	80+	4000	2,1
RK-EU-PA16 1x2250 D726 T840 OP LT80	1155	85	65	1159x89	2258	19,1	118	80+	4000	2,4
RK-EU-PA16 1x3100 D727 T840 OP LT80	1155	85	65	1159x89	3077	25,8	119	80+	4000	2,4
RK-EU-PA16 1x2850 D728 T840 OP LT80	1435	85	65	1439x89	2822	23,9	118	80+	4000	2,8
RK-EU-PA16 1x3850 D990 T840 OP LT80	1435	85	65	1439x89	3846	32,1	120	80+	4000	2,8

*Tolerance range for optical and electrical data: -10%. Values apply to an ambient temperature of 25°C. RIKADA is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification

OPTIONS AVAILABLE ON REQUEST:

LED	REFLECTOR AND OPTICS	CONTROL GEAR
T830	MPRZ LT92	DALI
T840	OP LT80	
	OP TP(a)	

MPRZ LT92



OP LT80

