


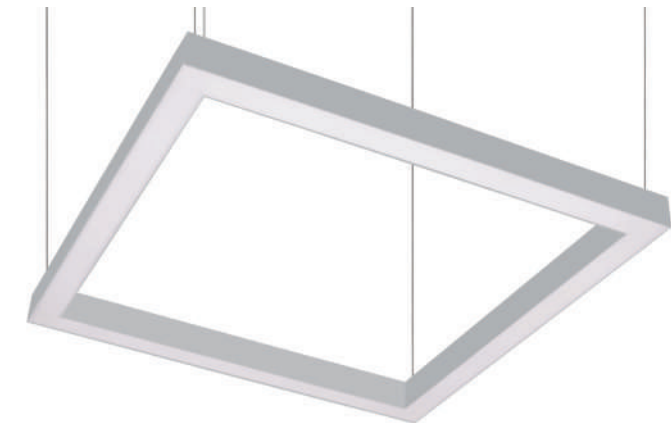


RK-EU-LNR15

Linear Lights



DESCRIPTION:	Suspended decorative LED luminaire Light distribution type: direct Optical system: opal polycarbonate diffuser / matt micro-prismatic polycarbonate diffuser, low glare Housing: aluminium Colour: light grey, RAL9006S; white, RAL9003S; black, RAL9005S
GENERAL DATA:	Mains voltage: 220-240V, 0/50-60Hz LED lifetime, h: 50000/L80B10 SDCM: 3 Protection class IEC: I Ingress protection code: IP40 Mechanical impact resistance: IK05 Operating temperature range, °C: ta 0...+35
INSTALLATION:	Suspended (wire and cap to be ordered separately). Cable 2.0m, 3x0.75mm², transparent
ENVIRONMENT:	Indoor
APPLICATION:	Office, education, retail, public place

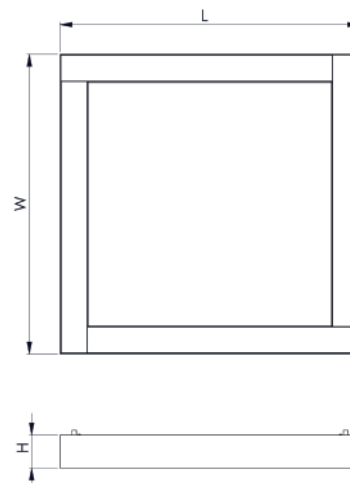

PRODUCT	LENGTH, mm	WIDTH, mm	HEIGHT, mm	LUMINAIRE OUTPUT*, lm	SYSTEM POWER*, W	SYSTEM EFFICACY*, lm/W	CRI	CCT*, K	WEIGHT, kg
RK-EU-LNR15 1x3250 J344 T840 OP	620	620	68	3051	24,8	123	80+	4000	4,6
RK-EU-LNR15 1x4400 J345 T840 OP	620	620	68	4158	34,7	120	80+	4000	4,6
RK-EU-LNR15 1x6050 J346 T840 OP	620	620	68	5716	50,9	112	80+	4000	4,6
RK-EU-LNR15 1x4550 D906 T840 OP	900	900	68	4482	36,4	123	80+	4000	6,6
RK-EU-LNR15 1x6200 D907 T840 OP	900	900	68	6100	52,5	116	80+	4000	6,6
RK-EU-LNR15 1x8400 D908 T840 OP	900	900	68	8272	77,8	106	80+	4000	6,6
RK-EU-LNR15 1x6100 D909 T840 OP	1180	1180	68	5976	48,5	123	80+	4000	8,8
RK-EU-LNR15 1x8250 D910 T840 OP	1180	1180	68	8133	70,0	116	80+	4000	8,8
RK-EU-LNR15 1x11200 D911 T840 OP	1180	1180	68	11030	103,7	106	80+	4000	8,8
RK-EU-LNR15 1x2850 J344 T840 DPRZ LT80	620	620	68	2848	24,8	115	80+	4000	4,6
RK-EU-LNR15 1x3850 J345 T840 DPRZ LT80	620	620	68	3881	34,7	112	80+	4000	4,6
RK-EU-LNR15 1x5300 J346 T840 DPRZ LT80	620	620	68	5335	50,9	105	80+	4000	4,6
RK-EU-LNR15 1x4550 D906 T840 DPRZ LT80	900	900	68	4183	36,4	115	80+	4000	6,6

PRODUCT	LENGTH, mm	WIDTH, mm	HEIGHT, mm	LUMINAIRE OUTPUT*, lm	SYSTEM POWER*, W	SYSTEM EFFICACY*, lm/W	CRI	CCT*, K	WEIGHT, kg
RK-EU-LNR15 1x6200 D907 T840 DPRZ LT80	900	900	68	5693	52,5	108	80+	4000	6,6
RK-EU-LNR15 1x8400 D908 T840 DPRZ LT80	900	900	68	7721	77,8	99	80+	4000	6,6
RK-EU-LNR15 1x6100 D909 T840 DPRZ LT80	1180	1180	68	5578	48,5	115	80+	4000	8,8
RK-EU-LNR15 1x8250 D910 T840 DPRZ LT80	1180	1180	68	7591	70,0	108	80+	4000	8,8
RK-EU-LNR15 1x11200 D911 T840 DPRZ LT80	1180	1180	68	10294	103,7	99	80+	4000	8,8

*Tolerance range for optical and electrical data: -10%. Values apply to an ambient temperature of 25°C. RIKADA is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification

AVAILABLE ACCESSORIES:



Product: Suspension MTG KIT SUSI
Description: Suspension wire set "I" type, 1.5m adjustable, 1pcs
**note - 4pcs MTG SUSI KIT for 1 luminaire required*



Product: CAP cable 3x0.75 2.0m clear
Description: Cable 3x0.75mm² for suspended luminaire up to 2.0 meters, transparent



Product: CAP4, light grey/ white/ black
Description: Square decorative metal cap for hiding cable inlet with suspension wire attachment point, push-in terminals 3x1x1.5mm², light grey/ white/ black





Product: CAP5, light grey/ white/ black
Description: Square decorative metal cap for hiding cable inlet with suspension wire attachment point, push-in terminals 5x1x1.5mm², light grey/ white/ black

Product: CAP cable clip D6.3mm SET clear
Description: Cable and suspension wire clip set, 4pcs. For cable diameter up to 6,3mm and wire diameter 1mm

OP

DPRZ LT80



OPTIONS AVAILABLE ON REQUEST:

LED	REFLECTOR AND OPTICS	CONTROL GEAR	EMERGENCY	CONNECTION	OTHER	COLOUR
T830	OP	DALI	EM3	CBF3-2.0m clear	SR	RAL
T840	DPRZ LT80	BLT	EM3A	CBF3-3.0m clear		
		KRBLT	EM3D	CBF5-2.0m clear		
		KRBLT DALI		CBF5-3.0m clear		

