

RK-EU-PA15

Recessed Panels




DESCRIPTION: Recessed plaster-in frameless LED luminaire
Light distribution type: direct
Optical system: opal PMMA diffuser
Housing: steel
Colour: white, RAL9003

GENERAL DATA: Mains voltage: 220-240V, 50-60Hz
LED lifetime, h: 50000/L80B10
SDCM: 3
Protection class IEC: I
Ingress protection code: IP20
Operating temperature range, °C: ta 0...+35

INSTALLATION: In ceilings with cut-out openings (mounting brackets included). Push-in terminal, 3x2x2.5mm²

ENVIRONMENT: Indoor

APPLICATION: Office, education, corridor, retail, public place

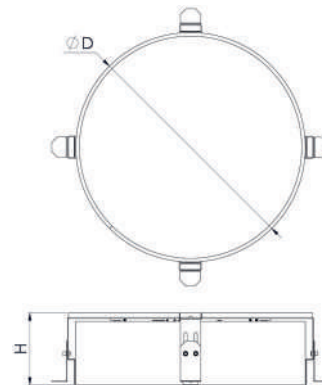

PRODUCT	DIAMETER, mm	HEIGHT, mm	CUT-OUT, mm	LUMINAIRE OUTPUT*, lm	SYSTEM POWER*, W	SYSTEM EFFICACY*, lm/W	CRI	CCT*, K	WEIGHT, kg
RK-EU-PA15 1x1800 D103 T840 OP LT80	300	142	305	1764	16,4	108	80+	4000	2,5
RK-EU-PA15 1x2450 D104 T840 OP LT80	300	142	305	2424	23,5	103	80+	4000	2,5
RK-EU-PA15 1x3600 D105 T840 OP LT80	450	142	455	3566	32,0	111	80+	4000	4,8
RK-EU-PA15 1x4150 D106 T840 OP LT80	450	142	455	4121	37,7	109	80+	4000	4,8
RK-EU-PA15 1x5300 D107 T840 OP LT80	600	152	605	5291	46,5	114	80+	4000	7,5
RK-EU-PA15 1x7300 D108 T840 OP LT80	600	152	605	7273	66,6	109	80+	4000	7,5
RK-EU-PA15 1x8850 D109 T840 OP LT80	900	152	905	8835	79,8	111	80+	4000	10,5
RK-EU-PA15 1x11700 D110 T840 OP LT80	900	152	905	11657	108,0	108	80+	4000	10,5

*Tolerance range for optical and electrical data: -10%. Values apply to an ambient temperature of 25°C. RIKADA is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification

OPTIONS AVAILABLE ON REQUEST:

LED	REFLECTOR AND OPTICS	CONTROL GEAR	SENSORS	EMERGENCY
T830	OP LT80	DALI	MW	EM3
T840	OP TP(a)	BLT	MWRFM+	EM3A
		KRBLT	MW DALI2	EM3D
		KRBLT DALI	MW KRBLT	
			MW KRBLT DALI	

OP LT80

