

RK-EU-FL04

Floodlights




DESCRIPTION: Surface mounted accent LED luminaire
Light distribution type: direct
Optical system: lenses, tempered glass diffuser, impact resistant
Housing: aluminium
Colour: dark grey, RAL7043

GENERAL DATA: Mains voltage: 220-240V, 50-60Hz
LED lifetime, h: 50000/L70B50
SDCM: 5
Protection class IEC: I
Ingress protection code: IP65
Mechanical impact resistance: IK08
Operating temperature range, °C: ta -25...+40

INSTALLATION: On the horizontal or vertical surface.
 Push-in terminal, 3x2x2.5mm² (for C313, 314 Cable, 0.3m, 3x0.75mm²)

ENVIRONMENT: Outdoor

APPLICATION: Facade illumination, public space

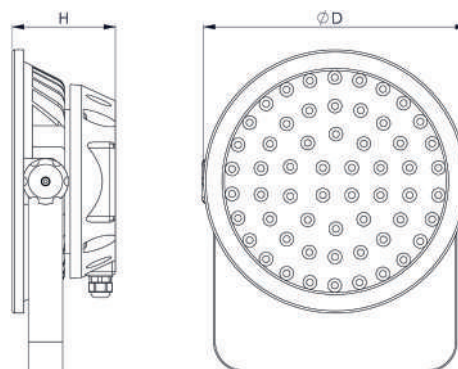

PRODUCT	DIAMETER, mm	HEIGHT, mm	LUMINAIRE OUTPUT*, lm	SYSTEM POWER*, W	SYSTEM EFFICACY*, lm/W	CRI	CCT*, K	WEIGHT, kg
RK-EU-FL04 1x1100 C313 T740 L30	120	90	1061	8,2	129	70+	4000	0,9
RK-EU-FL04 1x1500 C314 T740 L30	120	90	1484	10,7	139	70+	4000	0,9
RK-EU-FL04 1x4950 C399 T740 L30	230	118	4914	30,1	163	70+	4000	3,7
RK-EU-FL04 1x7200 C400 T740 L30	230	118	7193	46,6	154	70+	4000	3,7
RK-EU-FL04 1x8100 C401 T740 L30	230	118	8072	53,7	150	70+	4000	3,7
RK-EU-FL04 1x12500 C413 T740 L30	310	137	12459	78,9	158	70+	4000	6,5
RK-EU-FL04 1x16150 C414 T740 L30	310	137	16145	107,3	150	70+	4000	6,5
RK-EU-FL04 1x18600 C415 T740 L30	310	137	18577	127,2	146	70+	4000	6,5

*Tolerance range for optical and electrical data: -10%. Values apply to an ambient temperature of 25°C. RIKADA is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification

AVAILABLE ACCESSORIES:



Product: RK-EU-FL04 Louver D230
Description: RK-EU-FL04 louver for better glare control

Product: RK-EU-FL04 Louver D310
Description: RK-EU-FL04 louver for better glare control

OPTIONS AVAILABLE ON REQUEST:


LED	REFLECTOR AND OPTICS	CONTROL GEAR	CONNECTION
T730 ¹	L10	DALI ²	CBF3x1.5-N m ³
T740	L15		CBF5x1.5-N m ³
	L15x38		
	L30		
	L50		

¹ T730 option not applicable for models: C413, C414, C415


² DALI option not applicable for models: C313; C314

³ Please specify the length of outgoing cable before placing an order. CBF3x1.5-N m and CBF5x1.5-N m options are standard for models: C313, C314


L10




L15



L15x38



L30



L50

