

RK-EU-FL11

Floodlights




DESCRIPTION: **Ground-mounted accent LED luminaire**
Light distribution type: direct
Optical system: tempered glass diffuser, aluminium reflector, 15°/25°/45° beam angle
Housing: aluminium
Colour: black, RAL9005

GENERAL DATA: **Mains voltage:** 220-240V, 50-60Hz
LED lifetime, h: 50000/L80B50
SDCM: 5
Protection class IEC: I
Ingress protection code: IP65
Mechanical impact resistance: IK06
Operating temperature range, °C: ta -25...+45

INSTALLATION: On the ground. Cable, 0.45m, 3x1.0mm²

ENVIRONMENT: Outdoor

APPLICATION: Facade illumination, park, public space

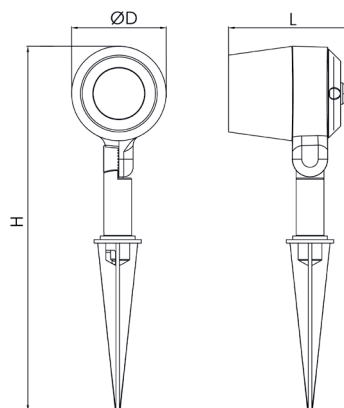

PRODUCT	LENGTH, mm	DIAMETER, mm	HEIGHT, mm	LUMINAIRE OUTPUT*, lm	SYSTEM POWER*, W	SYSTEM EFFICACY*, lm/W	CRI	CCT*, K	WEIGHT, kg
RK-EU-FL11 1x950 J785 T840 R15	104	80	309	909	8,0	114	80+	4000	0,4
RK-EU-FL11 1x950 J785 T840 R25	104	80	309	903	8,0	113	80+	4000	0,4
RK-EU-FL11 1x950 J785 T840 R45	104	80	309	916	8,0	115	80+	4000	0,4

*Tolerance range for optical and electrical data: -10%. Values apply to an ambient temperature of 25°C. RIKADA is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification

AVAILABLE ACCESSORIES:




Product: SURFACE HOLDER KIT - RK-EU-FL11
Description: Surface mounting kit


OPTIONS AVAILABLE ON REQUEST:

LED
T830
T840

R15



R25



R45

