


RK-EU-PA20

Recessed Panels



DESCRIPTION:	Recessed mounted LED luminaire Light distribution type: direct Optical system: white steel reflector, asymmetrical, opal PMMA diffuser Housing: steel Colour: white, RAL9003S
GENERAL DATA:	Mains voltage: 220-240V, 0/50-60Hz LED lifetime, h: 50000/L80B10 SDCM: 3 Protection class IEC: I Ingress protection code: IP40/20 Mechanical impact resistance: IK02 Operating temperature range, °C: ta 0...+35
INSTALLATION:	In modular suspended ceilings (600), in ceilings with cut-out openings (on request). Push-in terminal, 3x2x2.5mm ²
ENVIRONMENT:	Indoor
APPLICATION:	Office, education, showroom, retail, public place

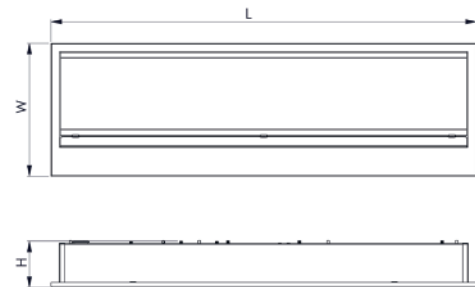

PRODUCT	LENGTH, mm	WIDTH, mm	HEIGHT, mm	LUMINAIRE OUTPUT*, lm	SYSTEM POWER*, W	SYSTEM EFFICACY*, lm/W	CRI	CCT*, K	WEIGHT, kg
RK-EU-PA20 1x1550 G874 T840 OP LT80	595	185	62	1518	13,6	111	80+	4000	1,9
RK-EU-PA20 1x2100 G875 T840 OP LT80	595	185	62	2086	19,5	107	80+	4000	1,9
RK-EU-PA20 1x3050 G876 T840 OP LT80	1195	185	62	3035	26,4	115	80+	4000	3,6
RK-EU-PA20 1x4200 G877 T840 OP LT80	1195	185	62	4173	37,8	110	80+	4000	3,6


*Tolerance range for optical and electrical data: -10%. Values apply to an ambient temperature of 25°C. RIKADA is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification

AVAILABLE ACCESSORIES:



Product: Recessed MTG brackets Barber R LED (185mm width)
Description: Support brackets for installation into a plasterboard ceiling. Barber R LED (185mm width), 2pcs

OP LT80



OPTIONS AVAILABLE ON REQUEST:

LED	REFLECTOR AND OPTICS	CONTROL GEAR	EMERGENCY	CONNECTION	OTHER
T830	OP LT80	DALI	EM3	WIE3-0.5m	SB
T840	OP TP(a)		EM3A	WIE5D-0.5m	W625
			EM3D	Schuko-1.5m	
				Schuko-3.0m	