

RK-EU-DS12

Diffused Surface Lights




DESCRIPTION: Surface mounted mirror LED luminaire
Light distribution type: direct
Optical system: opal polycarbonate diffuser
Housing: aluminium
Colour: white

GENERAL DATA: Mains voltage: 220-240V, 50-60Hz
LED lifetime, h: 30000/L70B50
SDCM: 5
Protection class IEC: II (I with built-in socket)
Ingress protection code: IP44
Mechanical impact resistance: IK04
Operating temperature range, °C: ta 0...+35

INSTALLATION: On the wall (mounting brackets included). Screw terminal, 2x1.5mm² (3x1.5mm² with built-in socket)

ENVIRONMENT: Indoor

APPLICATION: Hotel, bathroom, healthcare

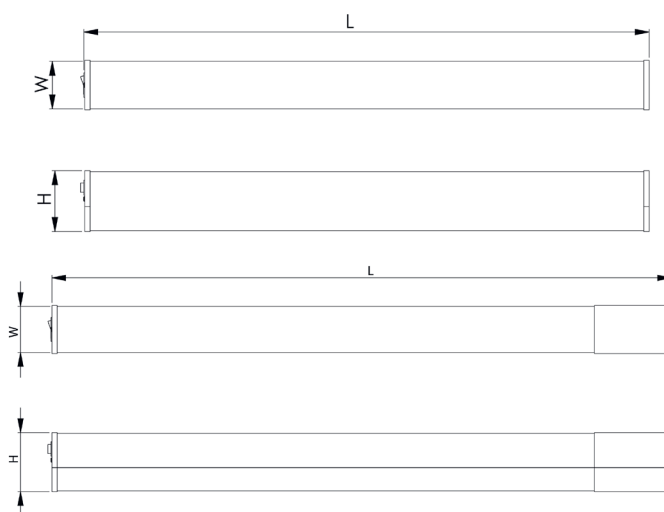

PRODUCT	LENGTH, mm	WIDTH, mm	HEIGHT, mm	LUMINAIRE OUTPUT*, lm	SYSTEM POWER*, W	SYSTEM EFFICACY*, lm/W	CRI	CCT*, K	WEIGHT, kg
RK-EU-DS12 1x1400 D552 T830 OP	600	53	65	1400	15,0	93	80+	3000	0,6
RK-EU-DS12 1x1400 D553 T830 OP SOCS44	682	53	65	1400	15,0	93	80+	3000	0,8

*Tolerance range for optical and electrical data : -10%. Values apply to an ambient temperature of 25°C. RIKADA is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification

OPTIONS AVAILABLE ON REQUEST:

CONNECTION

SOCS44

OP

