




RK-EU-PL05

Park and Street Lights



DESCRIPTION:	Pole-mounted LED park luminaire Light distribution type: direct Optical system: lenses, polycarbonate diffuser, impact resistant Housing: aluminium Colour: light grey, RAL9006
GENERAL DATA:	Mains voltage: 220-240V, 0/50-60Hz LED lifetime, h: 50000/L80B10 SDCM: 5 Protection class IEC: I Ingress protection code: IP66 Mechanical impact resistance: IK08 Operating temperature range, °C: ta -25...+40
INSTALLATION:	With three screws on pole Ø60mm. Push-in terminal, 3x2x2.5mm ²
ENVIRONMENT:	Outdoor
APPLICATION:	Park, public space

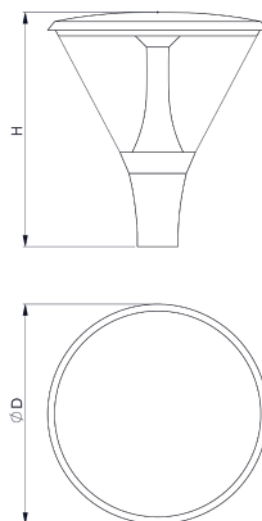

PRODUCT	DIAMETER, mm	HEIGHT, mm	LUMINAIRE OUTPUT*, lm	SYSTEM POWER*, W	SYSTEM EFFICACY*, lm/W	CRI	CCT*, K	WEIGHT, kg
RK-EU-PL05 1x5300 J674 T840	500	523	5275	39,3	134	80+	4000	9,0
RK-EU-PL05 1x7400 J675 T840	500	523	7394	58,3	127	80+	4000	9,0
RK-EU-PL05 1x9350 J708 T840	500	523	9328	78,1	119	80+	4000	9,0

*Tolerance range for optical and electrical data: -10%. Values apply to an ambient temperature of 25°C. RIKADA is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification

OPTIONS AVAILABLE ON REQUEST:

LED	CONTROL GEAR	CONNECTION
T830	DALI	CBF3x1.5-N m ¹
T840	ADIM	CBF5x1.5-N m ¹

¹ Please specify the length of outgoing cable before placing an order

STANDARD

