


RK-EU-DL14

Downlights



DESCRIPTION:	Surface mounted LED downlight Light distribution type: direct Optical system: opal polycarbonate diffuser Housing: aluminium Colour: white, RAL9016
GENERAL DATA:	Mains voltage: 220-240V, 50-60Hz LED lifetime, h: 60000/L80B10 SDCM: 3 Protection class IEC: I Ingress protection code: IP44 Mechanical impact resistance: IK04 Operating temperature range, °C: ta 0...+35
INSTALLATION:	On the ceiling or suspended. Push-in terminal, 3x2x2.5mm ²
ENVIRONMENT:	Indoor
APPLICATION:	Office, education, hotel, corridor, bathroom, retail, showroom, exhibition, public place

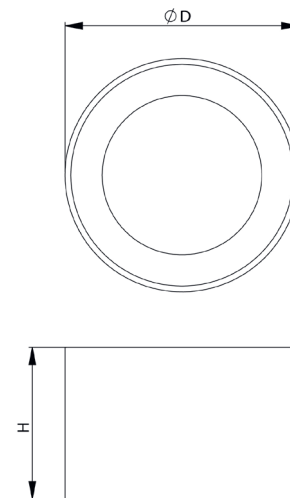

PRODUCT	DIAMETER, mm	HEIGHT, mm	LUMINAIRE OUTPUT*, lm	SYSTEM POWER*, W	SYSTEM EFFICACY*, lm/W	CRI	CCT*, K	WEIGHT, kg
RK-EU-DL14 1x1400 D345 T840 OP	200	130	1321	11,8	112	80+	4000	1,0
RK-EU-DL14 1x1900 D346 T840 OP	200	130	1858	16,0	116	80+	4000	1,0
RK-EU-DL14 1x2600 D347 T840 OP 1G	200	130	2575	23,1	112	80+	4000	1,0

*Tolerance range for optical and electrical data: -10%. Values apply to an ambient temperature of 25°C. RIKADA is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification

AVAILABLE ACCESSORIES:



Product: Suspension MTG KIT SUSI
Description: Suspension wire set "I" type, 1.5m adjustable, 1pcs
**note - 3pcs MTG KIT SUSI for one fitting required*
**note - SUS option is required*

OPTIONS AVAILABLE ON REQUEST:

LED	CONTROL GEAR	EMERGENCY	OTHER	COLOUR
T830	DALI	EM3	SUS	RAL
T840		EM3A ¹		
		EM3D ¹		

¹ EM3A, EM3D options not applicable for model: D347

STANDARD

