

RK-EU-WL03

Wall Lights



Tube M LED



Tube M UP LED



Tube M SR LED


DESCRIPTION: Surface mounted LED wall washer /Surface mounted accent LED luminaire Light
distribution type: direct
Optical system: lenses, tempered glass diffuser, impact resistant
Housing: aluminium
Colour: dark grey, RAL7043

GENERAL DATA: Mains voltage: 220-240V, 50-60Hz
LED lifetime, h: 60000/L80B10
SDCM: 3
Protection class IEC: I
Ingress protection code: IP65
Mechanical impact resistance: IK08
Operating temperature range, °C: ta -25...+40

INSTALLATION: On the wall or ceiling. Screw terminal, 3x1x1.5mm²

ENVIRONMENT: Outdoor

APPLICATION: Facade illumination

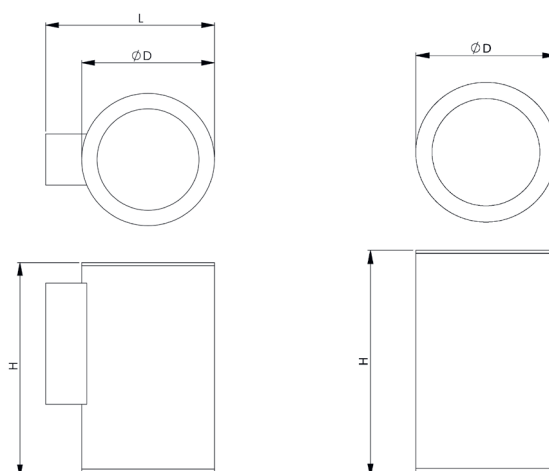


PRODUCT	LENGTH, mm	DIAMETER, mm	HEIGHT, mm	LUMINAIRE OUTPUT*, lm	SYSTEM POWER*, W	SYSTEM EFFICACY*, lm/W	CRI	CCT*, K	WEIGHT kg
Wall-mounted luminaires with up and down light distribution									
RK-EU-WL03 2x1100 D042 T840 L30	200	155	464	2115	19,3	110	80+	4000	3,2
RK-EU-WL03 2x1500 D043 T840 L30	200	155	464	2901	26,0	112	80+	4000	3,2
RK-EU-WL032x2000 D044 T840 L30	200	155	464	4026	38,4	105	80+	4000	3,2
Wall-mounted luminaires with up (or down) light distribution									
RK-EU-WL03 UP 1x1100 D045 T840 L30	200	155	250	1058	9,6	110	80+	4000	2,2
RK-EU-WL03 UP 1x1500 D046 T840 L30	200	155	250	1451	13,1	110	80+	4000	2,2
RK-EU-WL03 UP 1x2000 D047 T840 L30	200	155	250	2013	19,4	104	80+	4000	2,2
Ceiling-mounted luminaires with down light distribution									
RK-EU-WL03 SR 1x1100 D048 T840 L30		155	250	1058	9,6	110	80+	4000	2,2
RK-EU-WL03 SR 1x1500 D049 T840 L30		155	250	1451	13,1	110	80+	4000	2,2
RK-EU-WL03 SR x2000 D050 T840 L30		155	250	2013	19,4	104	80+	4000	2,2

*Tolerance range for optical and electrical data: -10%. Values apply to an ambient temperature of 25°C. RIKADA is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification


OPTIONS AVAILABLE ON REQUEST:

LED	REFLECTOR AND OPTICS
T830	L30
T840	L45
	L60


2x L30




2x L45




2x L60




UP L30




UP L45




UP L60



SR L30



SR L45



SR L60

