




RK-EU-TL06

Track Lights



DESCRIPTION:	Track mounted LED downlight Light distribution type: direct Optical system: opal polycarbonate diffuser Housing: aluminium Colour: white, RAL9016; black, RAL9005
GENERAL DATA:	Mains voltage: 220-240V, 0/50-60Hz LED lifetime, h: 60000/L80B10 SDCM: 3 Protection class IEC: I Ingress protection code: IP20 Mechanical impact resistance: IK02 Operating temperature range, °C: ta 0...+35
INSTALLATION:	In 3-phase track. Track adaptor (3-phase + N) with phase selector
ENVIRONMENT:	Indoor
APPLICATION:	Retail, showroom, exhibition, public place

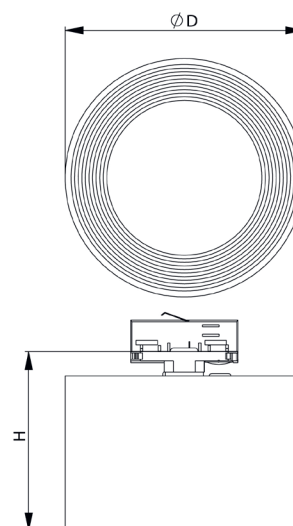

PRODUCT	DIAMETER, mm	HEIGHT, mm	LUMINAIRE OUTPUT*, lm	SYSTEM POWER*, W	SYSTEM EFFICACY*, lm/W	CRI	CCT*, K	WEIGHT, kg
RK-EU-TL06 1x1450 D948 T840 OP	200	150	1443	11,7	123	80+	4000	1,0
RK-EU-TL06 1x2000 D949 T840 OP	200	150	2023	16,2	125	80+	4000	1,0
RK-EU-TL06 1x2700 D950 T840 OP	200	150	2753	23,0	120	80+	4000	1,0

*Tolerance range for optical and electrical data: -10%. Values apply to an ambient temperature of 25°C. RIKADA is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification

OPTIONS AVAILABLE ON REQUEST:

LED	CONTROL GEAR	COLOUR
T830	DALI ¹	RAL ²
T840		

¹ For this model DALI option is not compatible with switch-control dimming functionality ² Standard tracks and adapters RAL colours: RAL9010, RAL9005, RAL7035

OP

