


RK-EU-AC07

Acoustic luminaires



DESCRIPTION:	Wall-mounted square decorative LED luminaire Light distribution type: indirect Optical system: none Housing: white steel body, RAL9003 Colour: made to the customer's specification
GENERAL DATA:	Mains voltage: 220-240V, 50-60Hz LED lifetime, h: 50000/L80B50 SDCM: 3 Protection class IEC: II Ingress protection code: IP40 Mechanical impact resistance: IK02 Operating temperature range, °C: ta 0...+35
INSTALLATION:	On the wall. Push-in terminal, 2x2x2.5mm ²
ENVIRONMENT:	Indoor
APPLICATION:	Office, education, retail, public place

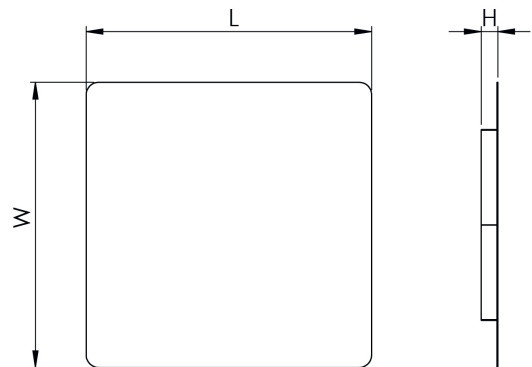

PRODUCT	DIAMETER, mm	HEIGHT, mm	LUMINAIRE OUTPUT*, lm	SYSTEM POWER*, W	SYSTEM EFFICACY*, lm/W	CRI	CCT*, K	WEIGHT, kg
RK-EU-AC07 1x900 J704 T840 M... (felt colour code)	450	40	879	11,3	78	80+	4000	3,1
RK-EU-AC07 1x1450 J705 T840 M... (felt colour code)	600	40	1406	18,1	78	80+	4000	4,5

*Tolerance range for optical and electrical data : -10%. Values apply to an ambient temperature of 25°C. RIKADA is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification

OPTIONS AVAILABLE ON REQUEST:

LED	CONTROL GEAR	COLOUR
T830	DALI	M... (felt colour code) ¹
T840		

¹ List of material colour is found on page 304

STANDARD

