



RK-EU-PA13

Recessed Panels




DESCRIPTION: Recessed mounted round LED panel
Light distribution type: direct
Optical system: opal diffuser / micro-prismatic diffuser, low glare
Housing: aluminum
Colour: white, RAL9016

GENERAL DATA: Mains voltage: 220-240V, 50-60Hz
LED lifetime, h: 50000/L80B20
SDCM: 3
Protection class IEC: II
Ingress protection code: IP40
Mechanical impact resistance: IK02
Operating temperature range, °C: ta 0...+40

INSTALLATION: In ceilings with cut-out openings. Push-in terminal, 2x1x1.5mm²

ENVIRONMENT: Indoor

APPLICATION: Office, education, corridor, retail, public place

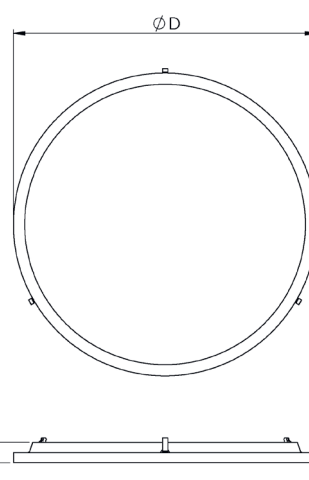

PRODUCT	DIAMETER, mm	HEIGHT, mm	CUT-OUT, mm	LUMINAIRE OUTPUT*, lm	SYSTEM POWER*, W	SYSTEM EFFICACY*, lm/W	CRI	CCT*, K	WEIGHT, kg
RK-EU-PA13 1x1800 J829 T830/40 OP	300	38	272	1755	13,5	130	80+	3000/4000	0,7
RK-EU-PA13 1x2500 J830 T830/40 OP	300	38	272	2470	19,0	130	80+	3000/4000	0,7
RK-EU-PA13 1x2550 J831 T830/40 OP	500	38	472	2522	19,4	130	80+	3000/4000	1,8
RK-EU-PA13 1x3650 J832 T830/40 OP	500	38	472	3640	28,0	130	80+	3000/4000	1,8
RK-EU-PA13 1x4550 J833 T830/40 OP	500	38	472	4550	35,0	130	80+	3000/4000	1,8
RK-EU-PA13 1x1650 J829 T830/40 DPRZ	300	38	272	1620	13,5	120	80+	3000/4000	0,7
RK-EU-PA13 1x2300 J830 T830/40 DPRZ	300	38	272	2280	19,0	120	80+	3000/4000	0,7
RK-EU-PA13 1x2350 J831 T830/40 DPRZ	500	38	472	2328	19,4	120	80+	3000/4000	1,8
RK-EU-PA13 1x3400 J832 T830/40 DPRZ	500	38	472	3360	28,0	120	80+	3000/4000	1,8
RK-EU-PA13 1x4200 J833 T830/40 DPRZ	500	38	472	4200	35,0	120	80+	3000/4000	1,8

*Tolerance range for optical and electrical data: -10%. Values apply to an ambient temperature of 25°C. RIKADA is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification

AVAILABLE ACCESSORIES:




Product: Decorative COVER 595x595/D451 Rana LED RAL9016
Description: Decorative cover with 451mm round opening for LED panel 595x595mm (1pcs), white steel

Product: Decorative COVER 625x625/D451 Rana LED RAL9016
Description: Decorative cover with 451mm round opening for LED panel 625x625mm (1pcs), white steel

OPTIONS AVAILABLE ON REQUEST:

LED	REFLECTOR AND OPTICS	CONTROL GEAR	EMERGENCY	CONNECTION
T830/40	OP	DALI	EM3A	QBX2-0.1m
	DPRZ	DALI LOOP	EM3D	Europlug-1.5m
		COR		Europlug-3.0m
		COR1min		WIE3-0.5m
		COR30min		WIE5D-0.5m

OP



DPRZ

