

RK-EU-SPT06

Spotlights



Horizontal rotation 355° and tilting -30°

DESCRIPTION: Recessed mounted adjustable LED spotlight

Light distribution type: direct

Optical system: faceted aluminium reflector, clear PMMA diffuser

Housing: aluminium

Colour: white, RAL9016

GENERAL DATA: Mains voltage: 220-240V, 0/50-60Hz

LED lifetime, h: 60000/L80B10

SDCM: 3

Protection class IEC: II

Ingress protection code: IP20


Mechanical impact resistance: IK02

Operating temperature range, °C: ta 0...+35

INSTALLATION: In ceilings with cut-out openings (mounting brackets included). Push-in terminal, 2x1.5mm²

ENVIRONMENT: Indoor

APPLICATION: Retail, showroom, museum, exhibition, public place

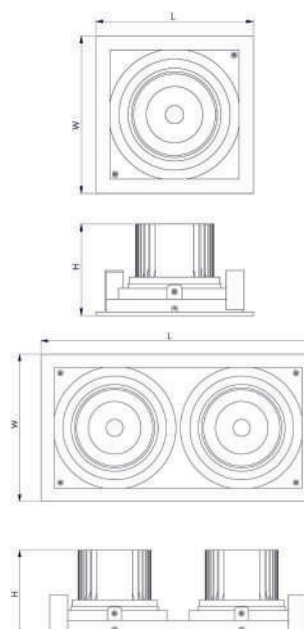


PRODUCT	LENGTH, mm	WIDTH, mm	HEIGHT, mm	CUT-OUT, mm	LUMINAIRE OUTPUT*, lm	SYSTEM POWER*, W	SYSTEM EFFICA-CY*, lm/W	CRI	CCT*, K	WEIGHT, kg
RK-EU-SPT06 1x1900 E828 T840 R40	175	175	119	165x165	1901	13,5	141	80+	4000	1,4
RK-EU-SPT06 1x2500 E829 T840 R40	175	175	119	165x165	2583	18,7	138	80+	4000	1,4
RK-EU-SPT06 1x3350 E830 T840 R40	175	175	119	165x165	3478	26,5	131	80+	4000	1,4
RK-EU-SPT06 2x1900 E831 T840 R40	350	175	119	340x165	3803	27,1	140	80+	4000	2,4
RK-EU-SPT06 2x2500 E832 T840 R40	350	175	119	340x165	5167	37,3	139	80+	4000	2,4
RK-EU-SPT06 2x3350 E833 T840 R40	350	175	119	340x165	6956	53,0	131	80+	4000	2,4

*Tolerance range for optical and electrical data: -10%. Values apply to an ambient temperature of 25°C. RIKADA is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification

OPTIONS AVAILABLE ON REQUEST:

LED	REFLECTOR AND OPTICS	CONTROL GEAR	CONNECTION	COLOUR
T830	R24	DALI	WIE3-0.5m	RAL
T840	R40		WIE5D-0.5m	
T930			Europlug-1.5m	
T940			Europlug-3.0m	
T820 MEAT				
T831 MEAT&WHITE				
T825 BREAD				
T930 VEGETABLES				
T932 FASHION				
T931 FASHION&WHITE				
T927 NATURAL				
T930 NATURAL				
T940 NATURAL				

R24



R40

