


RK-EU-PL06

Park and Street Lights



DESCRIPTION:	Pole-mounted LED park luminaire Light distribution type: direct Optical system: lenses, tempered glass diffuser, impact resistant Housing: aluminium Colour: black grey, RAL7021
GENERAL DATA:	Mains voltage: 220-240V, 0/50-60Hz LED lifetime, h: 100000/L90B10 SDCM: 3 Protection class IEC: I (II optional) Ingress protection code: IP65 Mechanical impact resistance: IK08 Operating temperature range, °C: ta -25...+40
INSTALLATION:	With three screws on pole Ø60mm. Push-in terminal, 3x2x2.5mm ²
ENVIRONMENT:	Outdoor
APPLICATION:	Parking area, park, public space

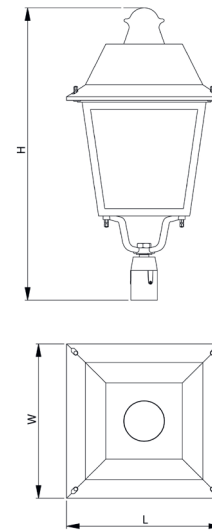

PRODUCT	LENGTH, mm	WIDTH, mm	HEIGHT, mm	LUMINAIRE OUTPUT*, lm	SYSTEM POWER*, W	SYSTEM EFFICACY*, lm/W	CRI	CCT*, K	WEIGHT, kg
RK-EU-PL06 1x4350 E941 T740 LS140	425	425	816	4451	34,0	131	70+	4000	8,2
RK-EU-PL06 1x5400 E942 T740 LS140	425	425	816	5557	44,3	125	70+	4000	8,2
RK-EU-PL06 1x6500 E943 T740 LS140	425	425	816	6677	51,0	131	70+	4000	8,2
RK-EU-PL06 1x8150 E944 T740 LS140	425	425	816	8335	65,8	127	70+	4000	8,2

*Tolerance range for optical and electrical data: -10%. Values apply to an ambient temperature of 25°C. RIKADA is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification

OPTIONS AVAILABLE ON REQUEST:

LED	REFLECTOR AND OPTICS	CONTROL GEAR	SENSORS	PROTECTION	COLOUR
T730	LS140	DALI	PCA	Tmin-40C	RAL
T740	LSM1	ADIM		II	
T750	LSS1				

LS140

LSM1

LSS1

