



RK-EU-TL03

Track Lights




DESCRIPTION: A cylindrical LED track light with symmetrical faceted reflector designed for the accent lighting
Light distribution type: direct
Optical system: faceted aluminium reflector, 36° (standard) and 24° beam angles
Housing: aluminium
Colour: white, RAL9016; black, RAL9017

GENERAL DATA: **Mains voltage:** 220-240V, 0/50-60Hz
LED lifetime, h: 60000/L80B10
SDCM: 3
Protection class IEC: II
Ingress protection code: IP20
Mechanical impact resistance: IK02
Operating temperature range, °C: ta 0...+35

INSTALLATION: Surface luminaire is designed to be fixed into 4/6-conductors surface/recessed tracks. Track adaptor (3-phase + N) with phase selector

ENVIRONMENT: Indoor

APPLICATION: Retail, showroom, museum, exhibition, public place

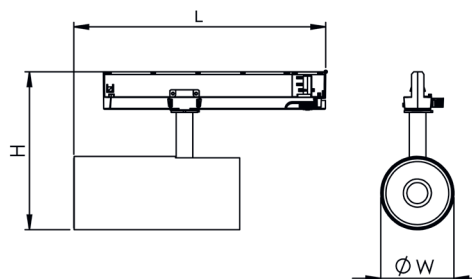


PRODUCT	LENGTH, mm	WIDTH, mm	HEIGHT, mm	LUMINAIRE OUTPUT*, lm	SYSTEM POWER*, W	SYSTEM EFFICACY*, lm/W	CRI	CCT*, K	WEIGHT, kg
RK-EU-TL03 1x1900 J670 T840 R36	290	83	145	1901	13,5	141	80+	4000	1,3
RK-EU-TL03 1x2500 J671 T840 R36	290	83	145	2583	18,7	138	80+	4000	1,3
RK-EU-TL03 1x3350 J672 T840 R36	290	83	145	3478	26,5	131	80+	4000	1,3

*Tolerance range for optical and electrical data: -10%. Values apply to an ambient temperature of 25°C. RIKADA is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification

OPTIONS AVAILABLE ON REQUEST:

LED	REFLECTOR AND OPTICS	CONTROL GEAR	COLOUR
T830	T932 FASHION	R24	DALI ¹ 2
T840	T931 FASHION&WHITE		BLACK
T930	T927 NATURAL		
T940	T930 NATURAL		
T820 MEAT	T940 NATURAL		
T831 MEAT&WHITE			
T825 BREAD			
T930 VEGETABLES			

R36



1 DALI option available with length 260mm

2 For this model DALI option is not compatible with switch-control dimming functionality