

RK-EU-TL05

Track Lights



DESCRIPTION: Track mounted adjustable LED spotlight

Light distribution type: direct

Optical system: faceted aluminium reflector, 60°, tempered glass diffuser

Housing: aluminium

Colour: white, RAL9016; black, RAL9017

GENERAL DATA:

Mains voltage: 220-240V, 0/50-60Hz

LED lifetime, h: 60000/L80B10

SDCM: 3

Protection class IEC: I

Ingress protection code: IP20

Mechanical impact resistance: IK02

Operating temperature range, °C: ta 0...+35

INSTALLATION:


In 3-phase track. Track adaptor (3-phase + N) with phase selector

ENVIRONMENT:

Indoor

APPLICATION:

Retail, showroom, exhibition, public place

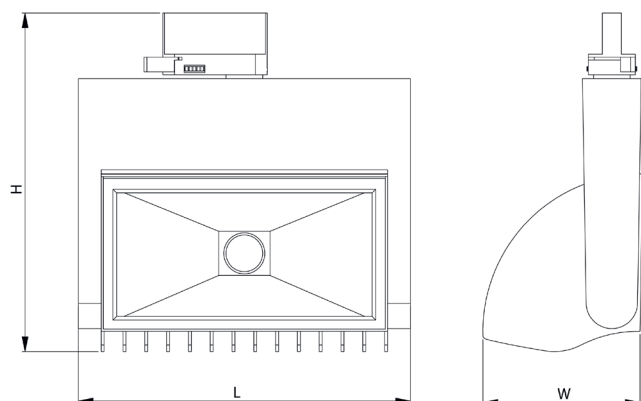

PRODUCT	LENGTH, mm	WIDTH, mm	HEIGHT, mm	LUMINAIRE OUTPUT*, lm	SYSTEM POWER*, W	SYSTEM EFFICACY*, lm/W	CRI	CCT*, K	WEIGHT, kg
RK-EU-TL05 1x1900 D749 T840 R60	226	107	248	1924	13,1	147	80+	4000	2,6
RK-EU-TL05 1x2550 D750 T840 R60	226	107	248	2613	19,5	134	80+	4000	2,6
RK-EU-TL05 1x3350 D751 T840 R60	226	107	248	3518	27,1	130	80+	4000	2,6
RK-EU-TL05 1x4250 J198 T840 R60	226	107	248	4414	35,1	126	80+	4000	2,6
RK-EU-TL05 1x4800 D789 T840 R60	226	107	248	5041	42,1	120	80+	4000	2,6
RK-EU-TL05 1x5250 D748 T840 R60	226	107	248	5606	47,1	119	80+	4000	2,6

*Tolerance range for optical and electrical data: -10%. Values apply to an ambient temperature of 25°C. RIKADA is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification

Note - standard tracks and adapters RAL colours: RAL9010, RAL9005, RAL7035

OPTIONS AVAILABLE ON REQUEST:

LED	CONTROL GEAR
T830	DALI ¹
T840	
T930	
T940	
T820 MEAT	
T831 MEAT&WHITE	
T825 BREAD	
T930 VEGETABLES	
T932 FASHION	
T931 FASHION&WHITE	
T927 NATURAL	
T930 NATURAL	
T940 NATURAL	

¹ For this model DALI option is not compatible with switch-control dimming functionality

R60

