

RK-EU-WL05

Wall Lights



L15



R36



SR R60



SR R90

DESCRIPTION:

Wall-mounted accent LED luminaire / Surface mounted accent LED luminaire
Light distribution type: direct/indirect or direct
Optical system: reflectors or lenses, tempered glass diffuser
Housing: aluminium
Colour: dark grey, RAL7043

GENERAL DATA:

Mains voltage: 220-240V, 50-60Hz
LED lifetime, h: 50000/L80B50
SDCM: 5
Protection class IEC: I
Ingress protection code: IP65
Mechanical impact resistance: IK08
Operating temperature range, °C: ta -30...+45

INSTALLATION:


On the wall. Screw terminal, 3x1x2.5mm² / On the ceiling. Cable, 0.15m, 3x1.0mm²

ENVIRONMENT:

Outdoor

APPLICATION:

Facade illumination / Facade illumination, parking area, public space

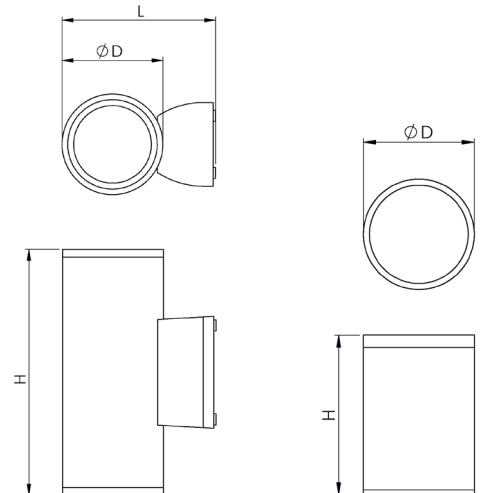

PRODUCT	LENGTH, mm	DIAMETER, mm	HEIGHT, mm	LUMINAIRE OUTPUT*, lm	SYSTEM POWER*, W	SYSTEM EFFICIACY*, lm/W	CRI	CCT*, K	WEIGHT, kg
Wall-mounted luminaires with up and down light distribution									
RK-EU-WL05 2x650 J789 T840 R36	132	90	220	1250	12,5	100	80+	4000	1,1
RK-EU-WL05 2x1100 J790 T840 R36	156	108	260	2160	27,0	80	80+	4000	1,6
RK-EU-WL05 2x650 J791 T840 L15	132	90	130	1288	12,5	103	80+	4000	0,9
RK-EU-WL05 2x750 J792 T840 L15	156	108	160	1490	17,0	88	80+	4000	1,5
Wall-mounted luminaires with up (or down) light distribution									
RK-EU-WL05 UP 1x700 J793 T840 R36	132	90	220	680	8,5	80	80+	4000	0,9
RK-EU-WL05 UP 1x1100 J794 T840 R36	156	108	260	1064	12,5	85	80+	4000	1,2
RK-EU-WL05 UP 1x650 J795 T840 L15	132	90	130	650	6,5	100	80+	4000	0,8
RK-EU-WL05 UP 1x800 J796 T840 L15	156	108	160	791	8,5	93	80+	4000	1,1
Ceiling-mounted luminaires with down light distribution									
RK-EU-WL05 SR 1x550 J797 T840 R60	90	90	113	520	6,5	80	80+	4000	0,6
RK-EU-WL05 SR 1x700 J798 T840 R60	108	108	150	680	8,5	80	80+	4000	0,9
RK-EU-WL05 SR 1x1100 J799 T840 R90	145	145	120	1100	12,5	88	80+	4000	1,4
RK-EU-WL05 SR 1x1150 J845 T840 R60	90	90	180	1136	12,5	91	80+	4000	0,8


*Tolerance range for optical and electrical data: -10%. Values apply to an ambient temperature of 25°C. RIKADA is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification

OPTIONS AVAILABLE ON REQUEST:


LED	REFLECTOR AND OPTICS
T830	R36 ¹
T840	R60 ¹

¹ Option is only available for models: J789; J790; J793; J794


2x R36




2x L15




UP R36



UP L15



SR R60



SR R90

