



RK-EU-WP16

Waterproof and Cleanroom Luminaires




DESCRIPTION: Recessed mounted LED panel
Light distribution type: direct
Optical system: opal diffuser
Housing: aluminum
Colour: white, RAL9016

GENERAL DATA: Mains voltage: 220-240V, 50-60Hz
LED lifetime, h: 50000/L70B50
SDCM: 5
Protection class IEC: II
Ingress protection code: IP54
Mechanical impact resistance: IK02
Operating temperature range, °C: ta 0...+35

INSTALLATION: In modular suspended ceilings (600), in ceilings with cut-out openings (accessories to be ordered separately). Push-in terminal, 2x2x2.5mm2

ENVIRONMENT: Indoor

APPLICATION: Healthcare, laboratory, industry

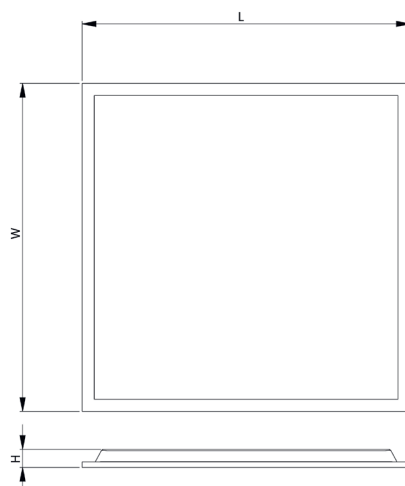

PRODUCT	LENGTH, mm	WIDTH, mm	HEIGHT, mm	LUMINAIRE OUTPUT*, lm	SYSTEM POWER*, W	SYSTEM EFFICACY*, lm/W	CRI	CCT*, K	WEIGHT, kg
RK-EU-WP16 1x3650 G616 T840 OP	595	595	33	3650	36,0	101	80+	4000	2,5
RK-EU-WP16 1x3650 G617 T840 OP	1195	295	33	3650	36,0	101	80+	4000	2,5

*Tolerance range for optical and electrical data: -10%. Values apply to an ambient temperature of 25°C. RIKADA is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification

AVAILABLE ACCESSORIES:



Product: Recessed MTG FRAME S626x626 RAL9003S
Description: Frame for LED luminaire 595x595mm installation into plasterboard ceiling (1pcs), white steel



Product: Recessed MTG FRAME S326x1226 RAL9003S
Description: Frame for LED luminaire 1195x295mm installation into plasterboard ceiling (1pcs), white steel

OPTIONS AVAILABLE ON REQUEST:

LED	CONTROL GEAR	EMERGENCY
T830	DALI	EM3
T840		EM3A
		EM3D

OP

