

RK-EU-LNR03

Linear Lights




DESCRIPTION: Recessed mounted middle profile LED luminaire for in-line connection
Light distribution type: direct
Optical system: opal polycarbonate diffuser / matt micro-prismatic polycarbonate diffuser, low glare
Housing: aluminium
Colour: white, RAL9003S; light grey, RAL9006S; black, RAL9005S

GENERAL DATA: **Mains voltage:** 220-240V, 0/50-60Hz
LED lifetime, h: 100000/L80B10, basic version: 50000/L80B10
SDCM: 3
Protection class IEC: I
Ingress protection code: IP40
Mechanical impact resistance: IK05
Glow wire test, °C: 850
Operating temperature range, °C: ta -15...+35

INSTALLATION: In ceilings with cut-out openings (mounting brackets included), Through wired, 3x1.5mm², push-in terminal 3x2x2.5mm² and supply cord

ENVIRONMENT: Indoor

APPLICATION: Office, education, hotel, corridor, retail, public place

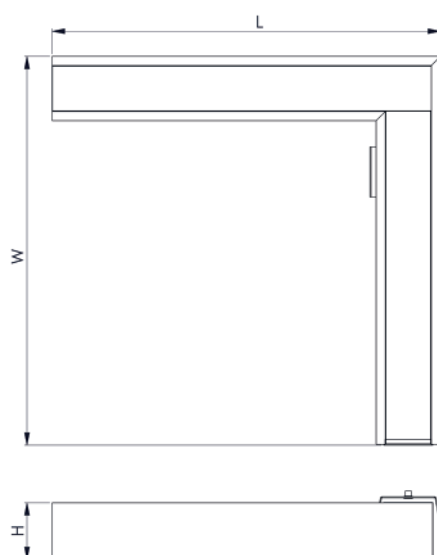

PRODUCT	LENGTH, mm	WIDTH, mm	HEIGHT, mm	CUT-OUT, mm	LUMINAIRE OUTPUT*, lm	SYSTEM POWER*, W	SYSTEM EFFICACY*, lm/W	CRI	CCT*, K	WEIGHT, kg
RK-EU-LNR03 1x1300 K313 T840 OP LO1 1LIN LL SB	465	465	68	460x460x68	1145	10,0	115	80+	4000	1,9
RK-EU-LNR03 1x1800 K314 T840 OP LO2 1LIN LL SB	465	465	68	460x460x68	1559	14,0	111	80+	4000	1,9
RK-EU-LNR03 1x2500 K315 T840 OP LO3 1LIN LL SB	465	465	68	460x460x68	2144	20,2	106	80+	4000	1,9
RK-EU-LNR03 1x3750 K316 T840 OP LO4 1LIN LL SB	465	465	68	460x460x68	3215	29,3	110	80+	4000	1,9
Basic version										
RK-EU-LNR03 1x1150 H447 T840 OP LO1 1LIN LL SB	465	465	68	460x460x68	1068	10,0	107	80+	4000	1,9
RK-EU-LNR03 1x1600 H448 T840 OP LO2 1LIN LL SB	465	465	68	460x460x68	1455	14,0	104	80+	4000	1,9
RK-EU-LNR03 1x2150 H449 T840 OP LO3 1LIN LL SB	465	465	68	460x460x68	2001	20,2	99	80+	4000	1,9
RK-EU-LNR03 1x3250 H450 T840 OP LO4 1LIN LL SB	465	465	68	460x460x68	3001	29,3	102	80+	4000	1,9


*Tolerance range for optical and electrical data: -10%. Values apply to an ambient temperature of 25°C. RIKADA is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification

OPTIONS AVAILABLE ON REQUEST:

LED	REFLECTOR AND OPTICS	CONTROL GEAR	CONNECTION	COLOUR
T830	OP	DALI ¹	5TB	RAL
T840	DPRZ LT80	BLT	1LIN	
		KRBLT	2LIN	
		KRBLT DALI	3LIN	
		TW ²	2G	
			CBF3-2.0m	

- 1 For DALI LIN option wires are 2x0.5mm²
2 Ask for special models with option TW

OP



DPRZ LT80

