

RK-EU-FL02

Floodlights




DESCRIPTION: Surface mounted basic LED floodlight
Light distribution type: direct
Optical system: white thermoplastic reflector, symmetric, tempered glass diffuser
Housing: die-cast aluminium
Colour: dark grey, RAL7043

GENERAL DATA: Mains voltage: 220-240V, 50-60Hz
LED lifetime, h: 25000/L70B50
SDCM: 5
Protection class IEC: I
Ingress protection code: IP65
Mechanical impact resistance: IK04
Operating temperature range, °C: ta -20...+40

INSTALLATION: On the horizontal or vertical surface.
 Cable, 0.3m, 3x1.00mm²

ENVIRONMENT: Outdoor

APPLICATION: Facade illumination, parking area, park, public space

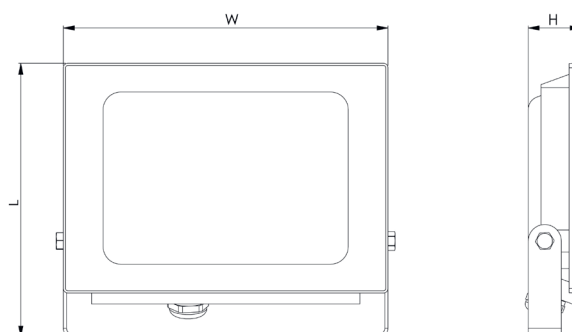

PRODUCT	LENGTH, mm	WIDTH, mm	HEIGHT, mm	LUMINAIRE OUTPUT*, lm	SYSTEM POWER*, W	SYSTEM EFFICACY*, lm/W	CRI	CCT*, K	WEIGHT, kg
RK-EU-FL02 1x2700 E923 T740	157	126	25	2700	30,0	90	70+	4000	0,4
RK-EU-FL02 1x4500 E924 T740	208	170	36	4500	50,0	90	70+	4000	0,9
RK-EU-FL02 1x9000 E925 T740	320	250	42	9000	100,0	90	70+	4000	1,9
RK-EU-FL02 1x18000 E926 T740	418	334	45	18000	200,0	90	70+	4000	3,7

*Tolerance range for optical and electrical data: -10%. Values apply to an ambient temperature of 25°C. RIKADA is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification

AVAILABLE ACCESSORIES:



Product: Power supply connector - IP66/IP68, 3x1.5mm²

Description: Quick and easy to connect power supply and luminaire cable connector - IP66/IP68, 3x1.5mm², 450V/10A, 1pcs

STANDARD

