

RK-EU-PA03

Recessed Panels




DESCRIPTION: Recessed mounted LED luminaire
Light distribution type: direct
Optical system: double parabolic reflector with lenses, low glare
Housing: steel
Colour: white, RAL9003S

GENERAL DATA: **Mains voltage:** 220-240V, 50-60Hz
LED lifetime, h: 100000/L80B10
SDCM: 3
Protection class IEC: II
Ingress protection code: IP40
Mechanical impact resistance: IK05
Operating temperature range, °C: ta 0...+35

INSTALLATION: In metal grid suspended ceilings. Luminaire from two parts and single gearbox can be installed into every next tile, or optionally into every forth tile

ENVIRONMENT: Indoor

APPLICATION: Office, education, corridor, retail, public place

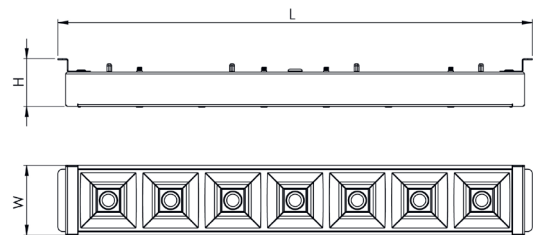

PRODUCT	LENGTH, mm	WIDTH, mm	HEIGHT, mm	LUMINAIRE OUTPUT*, lm	SYSTEM POWER*, W	SYSTEM EFFICACY*, lm/W	CRI	CCT*, K	WEIGHT, kg
RK-EU-PA03 1x750 J838 T840 WMC	305	45	31	730	4,9	149	80+	4000	1,3
RK-EU-PA03 1x900 J839 T840 WMC	305	45	31	896	6,1	147	80+	4000	1,3
RK-EU-PA03 1x1100 J840 T840 WMC	305	45	31	1056	7,4	143	80+	4000	1,3
RK-EU-PA03 1x2400 J886 T840 WMC	305	45	31	2393	19,5	123	80+	4000	1,3
RK-EU-PA03 2x1x750 J841 T840 WMC	305	45	31	1460	9,0	162	80+	4000	1,3
RK-EU-PA03 2x1x900 J842 T840 WMC	305	45	31	1792	11,1	161	80+	4000	1,3
RK-EU-PA03 2x1x1100 J843 T840 WMC	305	45	31	2111	13,4	158	80+	4000	1,3
RK-EU-PA03 2x1x2400 J887 T840 WMC	305	45	31	4787	37,0	129	80+	4000	1,3


*Tolerance range for optical and electrical data: -10%. Values apply to an ambient temperature of 25°C. RIKADA is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification

OPTIONS AVAILABLE ON REQUEST:


LED	REFLECTOR AND OPTICS	CONTROL GEAR	EMERGENCY	CONNECTION
T830	WMC	DALI	EM3A	WIE3-0.5m
T840	BMC		EM3D	WIE5D-0.5m
	MGC			Europlug-1.5m
	MMC			Europlug-3.0m
	WAC/BAC			QBX2-0.1m
				CONCB/4'

1 CONCB/4 option is only available for models: J841...J843


WMC BMC



MGC



MMC



WAC/BAC

