

RK-EU-DL12

Downlights




DESCRIPTION: Surface mounted LED downlight
Light distribution type: direct
Optical system: double parabolic reflector with lenses, low glare
Housing: steel
Colour: white, RAL9003S

GENERAL DATA: Mains voltage: 220-240V, 50-60Hz
LED lifetime, h: 60000/L80B10
SDCM: 3
Protection class IEC: I
Ingress protection code: IP40
Mechanical impact resistance: IK04
Operating temperature range, °C: ta 0...+35

INSTALLATION: On the ceiling. Push-in terminal, 3x2x2.5mm²

ENVIRONMENT: Indoor

APPLICATION: Office, education, hotel, corridor, bathroom, retail, showroom, public place

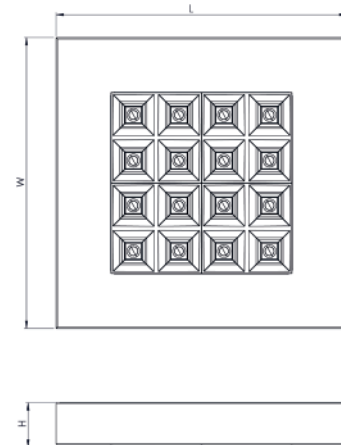

PRODUCT	LENGTH, mm	WIDTH, mm	HEIGHT, mm	LUMINAIRE OUTPUT*, lm	SYSTEM POWER*, W	SYSTEM EFFICACY*, lm/W	CRI	CCT*, K	WEIGHT, kg
RK-EU-DL12 1x2300 J578 T840 WMC	255	255	37	2050	15,7	131	80+	4000	1,4
RK-EU-DL12 1x2900 J579 T840 WMC	255	255	37	2646	18,0	147	80+	4000	1,4
RK-EU-DL12 1x3800 J580 T840 WMC	255	255	37	3777	25,3	149	80+	4000	1,4

*Tolerance range for optical and electrical data: -10%. Values apply to an ambient temperature of 25°C. RIKADA is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification

OPTIONS AVAILABLE ON REQUEST:

LED	REFLECTOR AND OPTICS	CONTROL GEAR	COLOUR
T830	WMC	DALI	RAL
T840	BMC		

WMC

BMC

