




RK-EU-HB07

High-bays



DESCRIPTION:	Suspended high-bay basic LED luminaire Light distribution type: direct Optical system: lens, 90°, polycarbonate, impact resistance Housing: die-cast aluminium Colour: black, RAL9011
GENERAL DATA:	Mains voltage: 220-240V, 50-60Hz LED lifetime, h: 50000/L70B50 SDCM: 5 Protection class IEC: I Ingress protection code: IP65 Mechanical impact resistance: IK08 Operating temperature range, °C: ta -20...+40
INSTALLATION:	Suspended (suspension hook included). Cable, 0.5m, 3x1.0mm ² DALI: Two cables, 0.5m, 3x1.0mm ² and 2x1.0mm ²
ENVIRONMENT:	Indoor
APPLICATION:	Industry, warehouse, hall

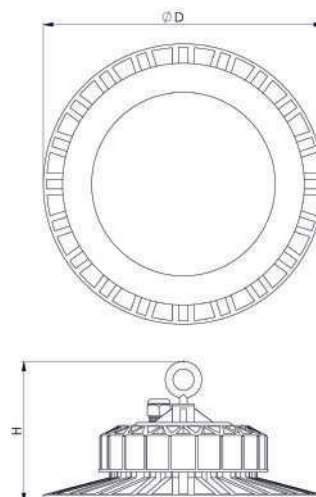

PRODUCT	DIAMETER, mm	HEIGHT, mm	LUMINAIRE OUTPUT*, lm	SYSTEM POWER*, W	SYSTEM EFFICACY*, lm/W	CRI	CCT*, K	WEIGHT, kg
RK-EU-HB07 1x28000 E929 T840	376	131	28991	189,5	153	80+	4000	3,7

*Tolerance range for optical and electrical data: -10%. Values apply to an ambient temperature of 25°C. RIKADA is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification

AVAILABLE ACCESSORIES:



Product: Power supply connector - IP66/IP68, 3x1.5mm²
Description: Quick and easy to connect power supply and luminaire cable connector - IP66/IP68, 3x1.5mm², 450V/10A, 1pcs



Product: One-point High-bay Suspension MTG KIT, 1.5m **Description:** One-point high bay suspension kit for lifting eye type mounts, 1.5 meter

Product: One-point High-bay Suspension MTG KIT, 3.0m **Description:** One-point high bay suspension kit for lifting eye type mounts, 3.0 meter

Product: One-point High-bay Suspension MTG KIT, 5.0m **Description:** One-point high bay suspension kit for lifting eye type mounts, 5.0 meter

OPTIONS AVAILABLE ON REQUEST:

CONTROL GEAR	CONNECTION
DALI ¹ 2	CBF3x1.5-N m ³
	CBF5x1.5-N m ³

1 For this model DALI option is not compatible with SWITCHDIM functionality

2 This option comes with two tails. One for power supply, other for controls

3 Please specify the length of outgoing cable before placing an order

E929

