


RK-EU-DL13

Downlights




DESCRIPTION: Surface mounted LED downlight
Light distribution type: direct
Optical system: faceted aluminium reflector, 50°, low glare
Housing: aluminium
Colour: white, RAL9016; black, RAL 9005S

GENERAL DATA: Mains voltage: 220-240V, 50-60Hz (220-240V, 0/50-60Hz for model D344)
LED lifetime, h: 60000/L80B10
SDCM: 3
Protection class IEC: I
Ingress protection code: IP20
Mechanical impact resistance: IK02
Operating temperature range, °C: ta 0...+35

INSTALLATION: On the ceiling or suspended. Push-in terminal, 3x2x2.5mm²

ENVIRONMENT: Indoor

APPLICATION: Office, education, hotel, corridor, bathroom, retail, showroom, exhibition, public place

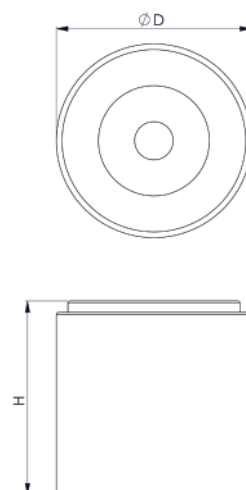

PRODUCT	DIAMETER, mm	HEIGHT, mm	LUMINAIRE OUTPUT*, lm	SYSTEM POWER*, W	SYSTEM EFFICACY*, lm/W	CRI	CCT*, K	WEIGHT, kg
RK-EU-DL13 1x1800 D342 T840	168	172	1813	13,5	134	80+	4000	1,0
RK-EU-DL13 1x2400 D343 T840	168	172	2463	19,8	124	80+	4000	1,0
RK-EU-DL13 1x3200 D344 T840	168	172	3316	26,8	124	80+	4000	1,0

*Tolerance range for optical and electrical data: -10%. Values apply to an ambient temperature of 25°C. RIKADA is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification

AVAILABLE ACCESSORIES:



Product: Suspension MTG KIT SUSI
Description: Suspension wire set "I" type, 1.5m adjustable, 1pcs
**note - 1pcs MTG KIT SUSI for one fitting required*
**note - SUS option is required*

OPTIONS AVAILABLE ON REQUEST:

LED	CONTROL GEAR	CONNECTION	OTHER
T830	DALI	1G	SUS
T840			
T927 NATURAL			
T930 NATURAL			
T940 NATURAL			

STANDARD

