


RK-EU-DL05

Downlights




DESCRIPTION: Recessed mounted LED downlight
Light distribution type: direct
Optical system: opal polycarbonate diffuser
Housing: aluminium
Colour: white, RAL9016

GENERAL DATA: Mains voltage: 220-240V, 0/50-60Hz
LED lifetime, h: 50000/L80B10
SDCM: 3
Protection class IEC: II
Ingress protection code: IP44
Mechanical impact resistance: IK04
Operating temperature range, °C: ta 0...+35

INSTALLATION: In ceilings with cut-out openings (mounting brackets included). Screw terminal, 2x1x1.5mm²

ENVIRONMENT: Indoor

APPLICATION: Office, education, hotel, corridor, bathroom, retail, showroom, public place

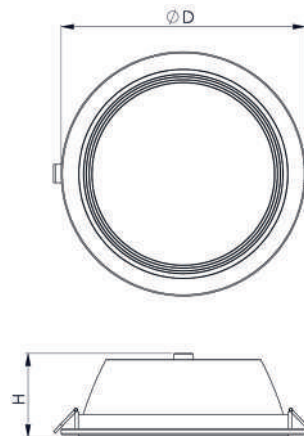

PRODUCT	DIAMETER, mm	HEIGHT, mm	CUT-OUT, mm	LUMINAIRE OUTPUT*, lm	SYSTEM POWER*, W	SYSTEM EFFICACY*, lm/W	CRI	CCT*, K	WEIGHT, kg
RK-EU-DL05 1x1100 E307 T840 OP	200	90	185	1053	9,3	113	80+	4000	0,8
RK-EU-DL05 1x1500 E308 T840 OP	200	90	185	1479	13,1	113	80+	4000	0,8
RK-EU-DL05 1x2100 E309 T840 OP	200	90	185	2035	18,7	109	80+	4000	0,8
RK-EU-DL05 1x1400 E310 T840 OP	235	90	220	1321	11,2	118	80+	4000	0,9
RK-EU-DL05 1x1900 E311 T840 OP	235	90	220	1858	16,0	116	80+	4000	0,9
RK-EU-DL05 1x2600 E312 T840 OP	235	90	220	2575	23,1	111	80+	4000	0,9

*Tolerance range for optical and electrical data: -10%. Values apply to an ambient temperature of 25°C. RIKADA is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification

OPTIONS AVAILABLE ON REQUEST:

LED	CONTROL GEAR	EMERGENCY	CONNECTION	COLOUR
T830	DALI	EM3A	WIE3-0.5m	RAL
T840		EM3D	WIE5D-0.5m	
			QBX2-0.1m	
			Europlug-1.5m	
			Europlug-3.0m	

