

RK-EU-DL11

Downlights



DESCRIPTION:

Recessed mounted LED downlight Light
distribution type: direct
Optical system: double parabolic reflector with lenses, low glare
Housing: steel
Colour: white, RAL9003S

GENERAL DATA:

Mains voltage: 220-240V, 50-60Hz
LED lifetime, h: 60000/L80B10
SDCM: 3
Protection class IEC: II
Ingress protection code: IP40
Mechanical impact resistance: IK04
Operating temperature range, °C: ta 0...+35

INSTALLATION:


In ceilings with cut-out openings (mounting brackets included). Push-in terminal, 2x1x1.5mm²

ENVIRONMENT:

Indoor

APPLICATION:

Office, education, hotel, corridor, bathroom, retail, showroom, public place

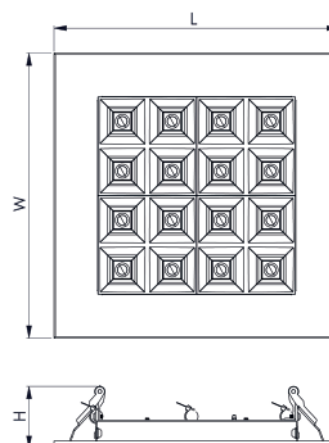

PRODUCT	LENGTH, mm	WIDTH, mm	HEIGHT, mm	CUT-OUT, mm	LUMINAIRE OUTPUT*, lm	SYSTEM POWER*, W	SYSTEM EFFICACY*, lm/W	CRI	CCT*, K	WEIGHT, kg
RK-EU-DL11 1x850 J690 T840 WMC	130	130	37	110x90	860	6,8	126	80+	4000	0,3
RK-EU-DL11 1x1150 J691 T840 WMC	130	130	37	110x90	1147	8,6	133	80+	4000	0,3
RK-EU-DL11 1x2300 J575 T840 WMC	230	230	37	210x180	2275	15,5	147	80+	4000	0,9
RK-EU-DL11 1x2900 J576 T840 WMC	230	230	37	210x180	2646	18,0	147	80+	4000	0,9
RK-EU-DL11 1x3800 J577 T840 WMC	230	230	37	210x180	3777	25,6	148	80+	4000	0,9

*Tolerance range for optical and electrical data: -10%. Values apply to an ambient temperature of 25°C. RIKADA is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification

OPTIONS AVAILABLE ON REQUEST:

LED	REFLECTOR AND OPTICS	CONTROL GEAR	EMERGENCY	CONNECTION	COLOUR
T830	WMC	DALI	EM3A ^{1 2}	WIE3-0.5m	RAL
T840	BMC		EM3D ^{1 2}	WIE5D-0.5m	
				Europlug-1.5m	
				Europlug-3.0m	

1 Operating temperature range for Luminaires with EM option, °C: ta 0... +35

2 EM3/A/D options not available for models: J690, J691

WMC

BMC

