


RK-EU-WP10

Waterproof and Cleanroom Luminaires



DESCRIPTION:	Surface mounted waterproof luminaire for LED tubes Light distribution type: direct Optical system: opal polycarbonate diffuser, UV stable Housing: polycarbonate Colour: light grey
GENERAL DATA:	Light source: LED / LEDS / LEDD Mains voltage: 220-240V, 50-60Hz Protection class IEC: I Ingress protection code: IP66 Mechanical impact resistance: IK06 Protection symbol: D Operating temperature range, °C: ta -20...+40
INSTALLATION:	On the ceiling or wall (mounting brackets included), or suspended (hooks included). Push-in terminal, 3x2x2.5mm ²
ENVIRONMENT:	Indoor
APPLICATION:	Industry, warehouse, hall, sports, public place, parking area, transport terminal, parking area

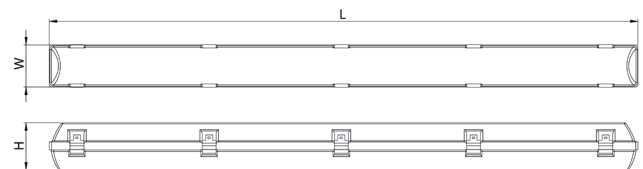

PRODUCT	LENGTH, mm	WIDTH, mm	HEIGHT, mm	LUMINAIRE OUTPUT*, lm	WEIGHT, kg
RK-EU-WP10 118 I14 LED ABS/PMMA	662	96	111	1xT8 LED (G13)	0,8
RK-EU-WP10 218 I15 LED ABS/PMMA	662	146	111	2xT8 LED (G13)	1,1
RK-EU-WP10 136 I16 LED ABS/PMMA	1272	96	111	1xT8 LED (G13)	1,6
RK-EU-WP10 236 I17 LED ABS/PMMA	1272	146	111	2xT8 LED (G13)	2,1
RK-EU-WP10 158 I18 LED ABS/PMMA	1572	96	111	1xT8 LED (G13)	1,9
RK-EU-WP10 258 I19 LED ABS/PMMA	1572	146	111	2xT8 LED (G13)	2,5
RK-EU-WP10 118 I14 LED ABS/PMMA IC	662	96	111	1xT8 LED (G13)	0,8
RK-EU-WP10 218 I15 LED ABS/PMMA IC	662	146	111	2xT8 LED (G13)	1,1
RK-EU-WP10 136 I16 LED ABS/PMMA IC	1272	96	111	1xT8 LED (G13)	1,6
RK-EU-WP10 236 I17 LED ABS/PMMA IC	1272	146	111	2xT8 LED (G13)	2,1
RK-EU-WP10 158 I18 LED ABS/PMMA IC	1572	96	111	1xT8 LED (G13)	1,9
RK-EU-WP10 258 I19 LED ABS/PMMA IC	1572	146	111	2xT8 LED (G13)	2,5
RK-EU-WP10 118 I14 LED ABS/PC	662	96	111	1xT8 LED (G13)	0,8
RK-EU-WP10 218 I15 LED ABS/PC	662	146	111	2xT8 LED (G13)	1,1
RK-EU-WP10 136 I16 LED ABS/PC	1272	96	111	1xT8 LED (G13)	1,6
RK-EU-WP10 236 I17 LED ABS/PC	1272	146	111	2xT8 LED (G13)	2,1
RK-EU-WP10 158 I18 LED ABS/PC	1572	96	111	1xT8 LED (G13)	1,9
RK-EU-WP10 258 I19 LED ABS/PC	1572	146	111	2xT8 LED (G13)	2,5
RK-EU-WP10 118 I14 LED ABS/PC IC	662	96	111	1xT8 LED (G13)	0,8
RK-EU-WP10 218 I15 LED ABS/PC IC	662	146	111	2xT8 LED (G13)	1,1
RK-EU-WP10 136 I16 LED ABS/PC IC	1272	96	111	1xT8 LED (G13)	1,6
RK-EU-WP10 236 I17 LED ABS/PC IC	1272	146	111	2xT8 LED (G13)	2,1
RK-EU-WP10 158 I18 LED ABS/PC IC	1572	96	111	1xT8 LED (G13)	1,9
RK-EU-WP10 258 I19 LED ABS/PC IC	1572	146	111	2xT8 LED (G13)	2,5

*Tolerance range for optical and electrical data: -10%. Values apply to an ambient temperature of 25°C. RIKADA is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification

Note - check wiring diagram before placing order: LED, LEDS, LEDD