


RK-EU-DS05

Diffused Surface Lights



DESCRIPTION:	Surface mounted plastic LED luminaire Light distribution type: direct Optical system: opal acrylic diffuser, UV resistant Housing: thermoplastic Colour: white; dark grey
GENERAL DATA:	Mains voltage: 220-240V, 0/50-60Hz LED lifetime, h: 50000/L80B10 SDCM: 3 Protection class IEC: II Ingress protection code: IP65 Mechanical impact resistance: IK08 Operating temperature range, °C: ta -15...+35 (from 0°C with EM3)
INSTALLATION:	On the ceiling or wall. Push-in terminal, 2x2x2.5mm ² (Screw terminal, 2x1.5mm ² for E27 version)
ENVIRONMENT:	Indoor/outdoor with roof
APPLICATION:	Office, education, hotel, corridor, staircase, healthcare, bathroom, public place, parking area

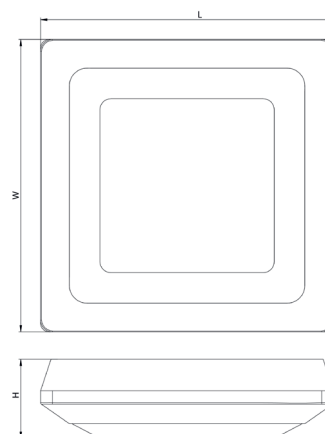

PRODUCT	LENGTH, mm	WIDTH, mm	HEIGHT, mm	LUMINAIRE OUTPUT*, lm	SYSTEM POWER*, W	SYSTEM EFFICACY*, lm/W	CRI	CCT*, K	WEIGHT, kg
RK-EU-DS05 1E27 Z70	295	295	90						1,4
RK-EU-DS05 1x1200 D960 T840 1G	295	295	90	1167	10,1	115	80+	4000	1,7
RK-EU-DS05 1x1650 D961 T840 1G	295	295	90	1631	14,7	111	80+	4000	1,7
RK-EU-DS05 1E27 Z70 LOUVER	295	295	90						1,4
RK-EU-DS05 1x1200 D960 T840 LOUVER	295	295	90	715	10,1	71	80+	4000	1,7
RK-EU-DS05 1x1650 D961 T840 LOUVER	295	295	90	999	14,7	68	80+	4000	1,7
RK-EU-DS05 1E27 Z70 DGREY	295	295	90						1,4
RK-EU-DS05 1x1200 D960 T840 DGREY	295	295	90	1167	10,1	115	80+	4000	1,7
RK-EU-DS05 1x1650 D961 T840 DGREY	295	295	90	1631	14,7	111	80+	4000	1,7
RK-EU-DS05 1E27 Z70 LOUVER DGREY	295	295	90						1,4
RK-EU-DS05 1x1200 D960 T840 LOUVER DGREY	295	295	90	715	10,1	71	80+	4000	1,7
RK-EU-DS05 1x1650 D961 T840 LOUVER DGREY	295	295	90	999	14,7	68	80+	4000	1,7


*Tolerance range for optical and electrical data : ~10%. Values apply to an ambient temperature of 25°C. RIKADA is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification

OPTIONS AVAILABLE ON REQUEST:

LED	COVERS	CONTROL GEAR	SENSORS	EMERGENCY
T830	LOUVER	DALI	MW	EM3 ¹
T840		BLT	MWRFM+	EM3A ¹
		KRBLT	MW DALI2	EM3D ¹
		KRBLT DALI	MW KRBLT	
			MW KRBLT DALI	

¹ Operating temperature range for Luminaires with EM option, °C: ta 0... +35

OP



LOUVER

