




RK-EU-FS01

Freestanding Lights



DESCRIPTION:	Freestanding floor or table clamp-on LED luminaire Light distribution type: direct/indirect Optical system: double parabolic reflector with lenses, UGR<16 Housing: aluminium Colour: white, RAL9016; light grey, RAL9006; black, RAL9005
GENERAL DATA:	Mains voltage: 220-240V, 50-60Hz LED lifetime, h: 50000/L80B20 SDCM: 3 (Fornax T LED: 5) Protection class IEC: I Ingress protection code: IP20 Mechanical impact resistance: IK02 Operating temperature range, °C: -10...+40
INSTALLATION:	Free-standing or clamp-on. Cable 2.8m with plug, Schuko type
ENVIRONMENT:	Indoor
APPLICATION:	Office, education

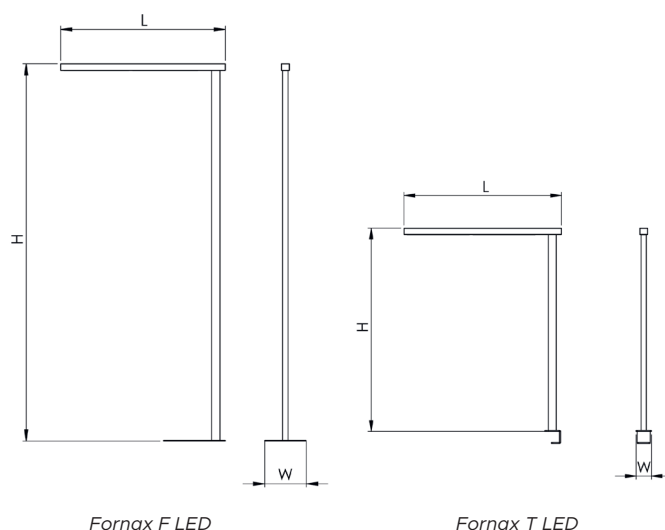

Fornax F LED

Fornax T LED

PRODUCT	LENGTH, mm	WIDTH, mm	HEIGHT, mm	LUMINAIRE OUTPUT*, lm	SYSTEM POWER*, W	SYSTEM EFFICACY*, lm/W	CRI	CCT*, K	WEIGHT, kg
RK-EU-FS01 1x10500 J869 T840 L1A15 DIM PIR RAL9016 Schuko-2.8m	1060	240	2050	10000	80,0	125	80	4000	12,5
RK-EU-FS01 1x10500 J870 T840 L1A15 DIM PIR RAL9016 Schuko-2.8m	1060	70	1300	10000	80,0	125	80	4000	5,1

*Tolerance range for optical and electrical data: -10%. Values apply to an ambient temperature of 25°C. RIKADA is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification

OPTIONS AVAILABLE ON REQUEST:

LED
T830
T840

STANDARD

