




RK-EU-WP03

Waterproof and Cleanroom Luminaires




DESCRIPTION: **Surface mounted or suspended waterproof LED luminaire**
Light distribution type: direct
Optical system: polycarbonate diffuser with with narrow beam (ceiling height 7,5...12m), models: J585-J588; wide beam (ceiling height 2,5...4m) models: J585-J596, UV stable, impact resistant
Housing: polycarbonate
Colour: light grey

GENERAL DATA: **Mains voltage:** 220-240V, 0/50-60Hz
LED lifetime, h: 100000/L80B50
SDCM: 3
Protection class IEC: I
Ingress protection code: IP66
Mechanical impact resistance: IK10
Operating temperature range, °C: ta -25...+45/+50

INSTALLATION: On the ceiling or wall (mounting brackets included), or suspended (hooks included). Push-in terminal, 3x2x2.5mm²

ENVIRONMENT: Indoor/outdoor with roof

APPLICATION: Industry, warehouse, hall, sports, public place, parking area, transport terminal, parking area

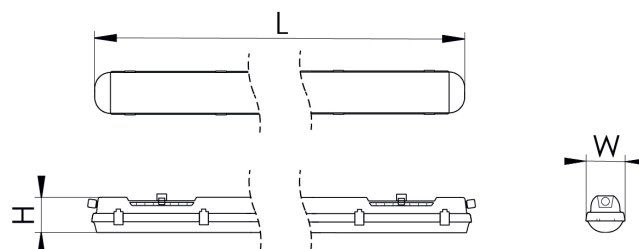

PRODUCT	LENGTH, mm	WIDTH, mm	HEIGHT, mm	LUMINAIRE OUTPUT*, lm	SYSTEM POWER*, W	SYSTEM EFFICACY*, lm/W	CRI	CCT*, K	WEIGHT, kg
RK-EU-WP03 1x4000 J585 T840 PC/PC L40x105	1175	98	84	3960	27,0	147	80+	4000	1,7
RK-EU-WP03 1x5700 J586 T840 PC/PC L40x105	1175	98	84	5700	38,0	150	80+	4000	1,7
RK-EU-WP03 1x4950 J587 T840 PC/PC L40x105	1455	98	84	4930	33,0	149	80+	4000	2,0
RK-EU-WP03 1x7050 J588 T840 PC/PC L40x105	1455	98	84	7040	45,0	156	80+	4000	2,0
RK-EU-WP03 1x2400 J589 T840 PC/PC L120x105	1175	98	84	2400	16,0	150	80+	4000	1,7
RK-EU-WP03 1x2900 J590 T840 PC/PC L120x105	1175	98	84	2890	20,0	145	80+	4000	1,7
RK-EU-WP03 1x4050 J591 T840 PC/PC L120x105	1175	98	84	4050	27,0	150	80+	4000	1,7
RK-EU-WP03 1x5850 J592 T840 PC/PC L120x105	1175	98	84	5820	38,0	153	80+	4000	1,7
RK-EU-WP03 1x3050 J593 T840 PC/PC L120x105	1455	98	84	3010	20,0	151	80+	4000	2,0
RK-EU-WP03 1x3650 J594 T840 PC/PC L120x105	1455	98	84	3610	24,0	150	80+	4000	2,0
RK-EU-WP03 1x5050 J595 T840 PC/PC L120x105	1455	98	84	5040	33,0	153	80+	4000	2,0
RK-EU-WP03 1x7200 J596 T840 PC/PC L120x105	1455	98	84	7200	45,0	160	80+	4000	2,0

*Tolerance range for optical and electrical data: -10%. Values apply to an ambient temperature of 25°C. RIKADA is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification

AVAILABLE ACCESSORIES:



Product: Suspension MTG KIT - RK-EU-WP04/WP05/WP06/WP01/WP07 1.5m
Description: Suspension kit for RK-EU-WP04/WP05/WP06/WP01/WP07 luminaires, 1.5 meter, 2pcs
Product: Suspension MTG KIT - RK-EU-WP04/WP05/WP06/WP01/WP07 3.0m
Description: Suspension kit for RK-EU-WP04/WP05/WP06/WP01/WP07 luminaires, 3.0 meter, 2pcs




Product: Remote Control HRC-11
Description: The functionality of the sensors is controlled by a number of parameters which can be changed or programmed remote with an infrared handset
**note - remote control for HBPIR-M; HBPIR DALI-M*

OPTIONS AVAILABLE ON REQUEST:

LED	CONTROL GEAR	SENSORS	EMERGENCY	CONNECTION	OTHER	PROTECTION
T830	DALI ¹	MW	EM3	5TB	IC	II
T840	BLT	HBPIR-M ²	EM3A ³	1LIN		
	KRBLT	HBPIR DALI-M ²	EM3Atmin-25	2LIN		
	KRBLT DALI	HBPIR KRBLT ²	EM3D ³	3LIN		
	COR	HBPIR KBRT DALI ²		1LIN2.5		
	COR1min			2LIN2.5		
	COR30min			3LIN2.5		
				C3		

- 1 For DALI LIN option wires are 2x0.5mm²
 2 Luminaire with integrated PIR sensor protection degree is IK05
 3 Operating temperature range for Luminaires with EM option, °C: ta 0... +35

L40x105



L120x105

