


RK-EU-SPT10

Spotlights



DESCRIPTION:	Recessed mounted adjustable LED spotlight Light distribution type: direct Optical system: faceted aluminium reflector, clear PMMA diffuser Housing: aluminium Colour: white, RAL9016; black, RAL9017
GENERAL DATA:	Mains voltage: 220-240V, 50-60Hz (220-240V, 0/50-60Hz for model G670) LED lifetime, h: 60000/L80B10 SDCM: 3 Protection class IEC: II Ingress protection code: IP20 Mechanical impact resistance: IK02 Operating temperature range, °C: ta 0...+35
INSTALLATION:	In ceilings with cut-out openings (mounting brackets included). Push-in terminal, 2x1x1.5mm ²
ENVIRONMENT:	Indoor
APPLICATION:	Retail, showroom, museum, exhibition, public place

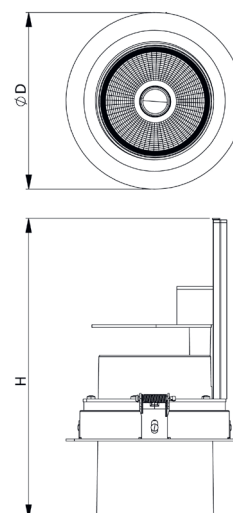


PRODUCT	DIAMETER, mm	HEIGHT, mm	CUT-OUT, mm	LUMINAIRE OUTPUT*, lm	SYSTEM POWER*, W	SYSTEM EFFICACY*, lm/W	CRI	CCT*, K	WEIGHT, kg
RK-EU-SPT10 1x1900 G668 T840 R40 RAL9016	125	170	118	1924	13,5	143	80+	4000	0,9
RK-EU-SPT10 1x2550 G669 T840 R40 RAL9016	125	170	118	2613	19,8	132	80+	4000	0,9
RK-EU-SPT10 1x3350 G670 T840 R40 RAL9016	125	170	118	3518	27,1	130	80+	4000	0,9

*Tolerance range for optical and electrical data: -10%. Values apply to an ambient temperature of 25°C. RIKADA is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification


OPTIONS AVAILABLE ON REQUEST:

LED	REFLECTOR AND OPTICS	CONTROL GEAR	CONNECTION
T830	R24	DALI	WIE3-0.5m
T840	R40		WIE5D-0.5m
T930	R60		Europlug-1.5m
T940			Europlug-3.0m
T820 MEAT			
T831 MEAT&WHITE			
T825 BREAD			
T930 VEGETABLES			
T932 FASHION			
T931 FASHION&WHITE			
T927 NATURAL			
T930 NATURAL			
T940 NATURAL			

R24



R40



R60

