


RK-EU-ST01

Step Lights

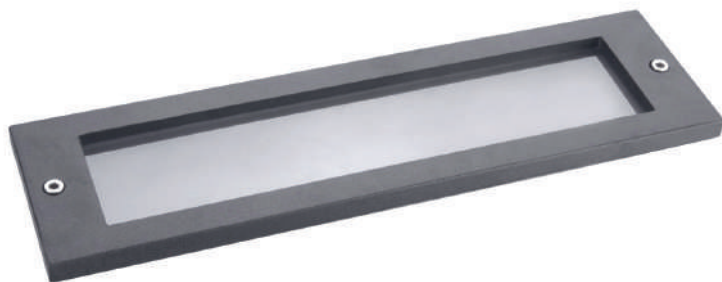


DESCRIPTION: Recessed wall-mounted accent LED luminaire
Light distribution type: direct
Optical system: frosted tempered glass diffuser, impact resistant
Housing: aluminium
Colour: dark grey, RAL7043

GENERAL DATA: Mains voltage: 220-240V, 50-60Hz
LED lifetime, h: 50000/L80B10
SDCM: 3
Protection class IEC: I
Ingress protection code: IP54
Mechanical impact resistance: IK08
Operating temperature range, °C: ta -25...+40

INSTALLATION: Into the wall. Push-in terminal, 3x2x2.5mm²

ENVIRONMENT: Outdoor

APPLICATION: Facade illumination, underground passage, park, public space

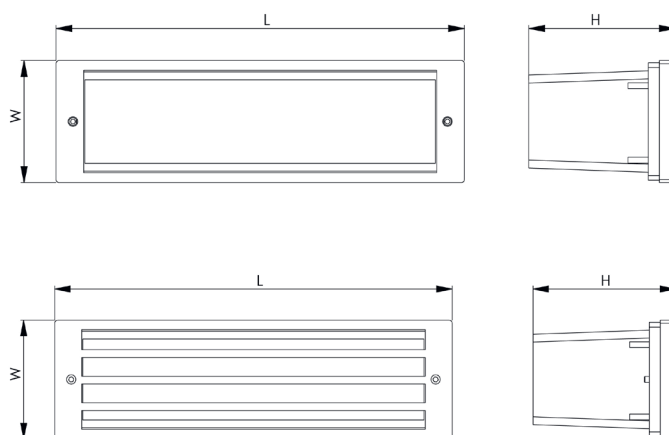

PRODUCT	LENGTH, mm	WIDTH, mm	HEIGHT, mm	CUT-OUT, mm	LUMINAIRE OUTPUT*, lm	SYSTEM POWER*, W	SYSTEM EFFICACY*, lm/W	CRI	CCT*, K	WEIGHT, kg
RK-EU-ST01 1E27 Q75	255	70	95	257x75x95						1,2
RK-EU-ST01 1x300 D058 T840	255	70	95	257x75x95	232	3,6	64	80+	4000	1,2
RK-EU-ST01 1E27 Q75 GRID	255	70	95	257x75x95						1,2
RK-EU-ST01 1x300 D058 T840 GRID	255	70	95	257x75x95	116	3,6	32	80+	4000	1,2

*Tolerance range for optical and electrical data: -10%. Values apply to an ambient temperature of 25°C. RIKADA is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification

OPTIONS AVAILABLE ON REQUEST:

LED	COLOUR
T830	RAL
T840	

STANDARD

