


RK-EU-SU17

Surface and Suspended Luminaires



DESCRIPTION:	Surface or suspended LED lightbox Light distribution: direct Optical system: soft film, white, low glare Housing: aluminium Colour: black, RAL9005
GENERAL DATA:	Mains voltage: 220-240V, 50-60Hz LED lifetime, h: 50000/L80B20 SDCM: 3 Protection class IEC: I Ingress protection code: IP40 Mechanical impact resistance: IK02 Operating temperature range, °C: ta -10...+40
INSTALLATION:	Suspended (accessories included). Push-in terminal, 3x2x2.5mm ²
ENVIRONMENT:	Indoor
APPLICATION:	Office, hotel, retail, showroom, museum, exhibition, public place

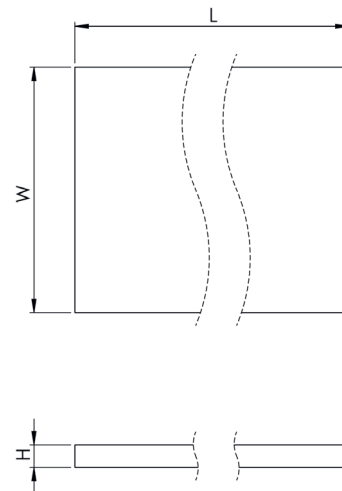

PRODUCT	LENGTH, mm	WIDTH, mm	HEIGHT, mm	LUMINAIRE OUTPUT*, lm	SYSTEM POWER*, W	SYSTEM EFFICACY*, lm/W	CRI	CCT*, K	WEIGHT, kg
RK-EU-SU17 1x4800 J872 T940 RAL9005	1200	1200	110	4800	60,0	80	90	4000	11,0
RK-EU-SU17 1x9600 J873 T940 RAL9005	2400	1200	110	9600	120,0	80	90	4000	21,0
RK-EU-SU17 1x14400 J874 T940 RAL9005	3000	1200	110	14400	180,0	80	90	4000	27,0

*Tolerance range for optical and electrical data: -10%. Values apply to an ambient temperature of 25°C. RIKADA is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification

*Suspension kit is included

AVAILABLE ACCESSORIES:



Product: Surface MTG kit RK-EU-SU17 series
S1200x1200 RAL9005
Description: Surface mounting kit for RK-EU-SU17 LED luminaire 1200x1200mm (6pcs), black steel

Product: Surface MTG kit RK-EU-SU17 series
S2400x1200 RAL9005
Description: Surface mounting kit for RK-EU-SU17 LED luminaire 2400x1200mm (12pcs), black steel

Product: Surface MTG kit RK-EU-SU17 series
S3000x1200 RAL9005
Description: Surface mounting kit for RK-EU-SU17 LED luminaire 3000x1200mm (14pcs), black steel

OPTIONS AVAILABLE ON REQUEST:

LED	CONTROL GEAR
T930	DALI
T940	

STANDARD

