

RK-EU-PA14

Recessed Panels




DESCRIPTION: Recessed mounted LED luminaire
Light distribution type: direct
Optical system: opal PMMA diffuser
Housing: steel
Colour: white, RAL9003

GENERAL DATA: Mains voltage: 220-240V, 0/50-60Hz
LED lifetime, h: 50000/L80B10
SDCM: 3
Protection class IEC: I
Ingress protection code: IP20
Operating temperature range, °C: ta 0...+35

INSTALLATION: In ceilings with cut-out openings (mounting brackets included). Push-in terminal, 3x2x2.5mm²

ENVIRONMENT: Indoor

APPLICATION: Office, education, corridor, retail, public place

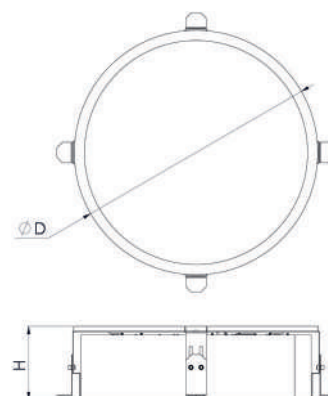

PRODUCT	DIAMETER, mm	HEIGHT, mm	CUT-OUT, mm	LUMINAIRE OUTPUT*, lm	SYSTEM POWER*, W	SYSTEM EFFICACY*, lm/W	CRI	CCT*, K	WEIGHT, kg
RK-EU-PA14 1x1800 D083 T840 OP LT80	326	143	310	1764	15,7	112	80+	4000	4,0
RK-EU-PA14 1x2450 D084 T840 OP LT80	326	143	310	2424	23,0	105	80+	4000	4,0
RK-EU-PA14 1x3600 D085 T840 OP LT80	476	143	460	3566	31,7	112	80+	4000	6,8
RK-EU-PA14 1x4150 D086 T840 OP LT80	476	143	460	4121	37,7	109	80+	4000	6,8
RK-EU-PA14 1x5300 D087 T840 OP LT80	624	153	610	5291	46,5	114	80+	4000	10,0
RK-EU-PA14 1x7300 D088 T840 OP LT80	624	153	610	7273	66,6	109	80+	4000	10,0
RK-EU-PA14 1x8850 D089 T840 OP LT80	922	153	910	8835	81,7	108	80+	4000	14,0
RK-EU-PA14 1x11700 D090 T840 OP LT80	922	153	910	11657	110,4	106	80+	4000	14,0

*Tolerance range for optical and electrical data: -10%. Values apply to an ambient temperature of 25°C. RIKADA is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification

OPTIONS AVAILABLE ON REQUEST:

LED	REFLECTOR AND OPTICS	CONTROL GEAR	SENSORS	EMERGENCY	COLOUR
T830	OP LT80	DALI	MW	EM3	RAL
T840	OP TP(a)	BLT	MWRFM+	EM3A	
		KRBLT	MW DALI2	EM3D	
		KRBLT DALI	MW KRBLT		
			MW KRBLT DALI		

OP LT80

