

RK-EU-AC06

Acoustic luminaires




DESCRIPTION: Wall-mounted round decorative LED luminaire
Light distribution type: indirect
Optical system: none
Housing: white steel body, RAL9003
Colour: made to the customer's specification

GENERAL DATA: Mains voltage: 220-240V, 50-60Hz
LED lifetime, h: 50000/L80B50
SDCM: 3
Protection class IEC: II
Ingress protection code: IP40
Mechanical impact resistance: IK02
Operating temperature range, °C: ta 0...+35

INSTALLATION: On the wall. Push-in terminal, 2x2x2.5mm²

ENVIRONMENT: Indoor

APPLICATION: Office, education, retail, public place

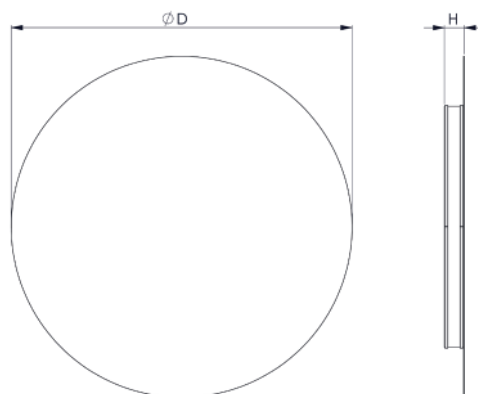

PRODUCT	DIAMETER, mm	HEIGHT, mm	LUMINAIRE OUTPUT*, lm	SYSTEM POWER*, W	SYSTEM EFFICACY*, lm/W	CRI	CCT*, K	WEIGHT, kg
RK-EU-AC06 1x700 J702 T840 M...(felt colour code)	450	40	659	8,5	78	80+	4000	2,4
RK-EU-AC06 1x1100 J703 T840 M...(felt colour code)	600	40	1099	14,1	78	80+	4000	3,5

*Tolerance range for optical and electrical data : -10%. Values apply to an ambient temperature of 25°C. RIKADA is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification

OPTIONS AVAILABLE ON REQUEST:

LED	CONTROL GEAR	COLOUR
T830	DALI	M... (felt colour code) ¹
T840		

¹ List of material colour is found on page 304

STANDARD

