

RK-EU-DL08

Downlights




DESCRIPTION: Recessed mounted basic LED downlight
Light distribution type: direct
Optical system: opal polycarbonate diffuser
Housing: polycarbonate
Colour: white, RAL9016

GENERAL DATA: **Mains voltage:** 220-240V, 50-60Hz
LED lifetime, h: 40000/L70B50
SDCM: 5
Protection class IEC: II
Ingress protection code: IP44
Mechanical impact resistance: IK04
Operating temperature range, °C: ta 0...+35

INSTALLATION: In ceilings with cut-out openings (mounting brackets included). Push-in terminal, 2x1x1.5 mm²

ENVIRONMENT: Indoor

APPLICATION: Office, education, hotel, corridor, bathroom, retail, showroom, public place

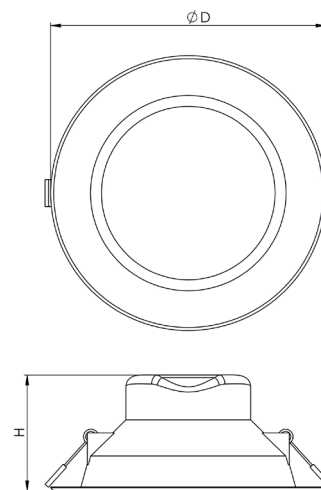

PRODUCT	DIAMETER, mm	HEIGHT, mm	CUT-OUT, mm	LUMINAIRE OUTPUT*, lm	SYSTEM POWER*, W	SYSTEM EFFICACY*, lm/W	CRI	CCT*, K	WEIGHT, kg
RK-EU-DL08 1x700 D522 T840 OP	92	64	75	700	7,0	100	80+	4000	0,2
RK-EU-DL08 1x1000 D523 T840 OP	113	73	95	980	10,0	98	80+	4000	0,2
RK-EU-DL08 1x1400 D524 T840 OP	174	79	150	1400	14,0	100	80+	4000	0,3
RK-EU-DL08 1x2100 D525 T840 OP	244	95	200	2060	20,0	103	80+	4000	0,6

*Tolerance range for optical and electrical data: -10%. Values apply to an ambient temperature of 25°C. RIKADA is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification

OPTIONS AVAILABLE ON REQUEST:

LED
T830
T840

OP

