



RK-EU-PA09

Recessed Panels




DESCRIPTION: Recessed mounted LED luminaire Light distribution type: direct
Optical system: matt micro-prismatic PMMA diffuser, low glare / translucent micro-prismatic PMMA diffuser
Housing: steel
Colour: white, RAL9003S

GENERAL DATA: Mains voltage: 220-240V, 50-60Hz
LED lifetime, h: 50000/L80B10
SDCM: 3
Protection class IEC: I
Ingress protection code: IP44
Mechanical impact resistance: IK05
Operating temperature range, °C: ta 0...+35

INSTALLATION: In modular suspended ceilings, in ceilings with cut-out openings (mounting frame to be ordered separately). Push-in terminal, 3x2x2.5mm²

ENVIRONMENT: Indoor

APPLICATION: Office, education, corridor, retail, public place

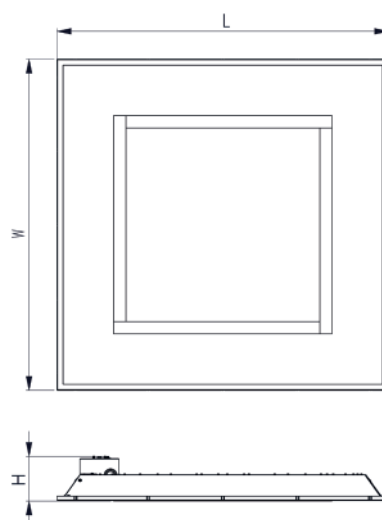

PRODUCT	LENGTH, mm	WIDTH, mm	HEIGHT, mm	LUMINAIRE OUTPUT*, lm	SYSTEM POWER*, W	SYSTEM EFFICACY*, lm/W	CRI	CCT*, K	WEIGHT, kg
RK-EU-PA09 1x2350 J229 T840 DPRZ LT80	595	595	82	2326	17,1	136	80+	4000	3,0
RK-EU-PA09 1x2900 J230 T840 DPRZ LT80	595	595	82	2884	21,2	136	80+	4000	3,0
RK-EU-PA09 1x3450 J231 T840 DPRZ LT80	595	595	82	3430	25,4	135	80+	4000	3,0
RK-EU-PA09 1x3950 J232 T840 DPRZ LT80	595	595	82	3929	29,7	132	80+	4000	3,0
RK-EU-PA09 1x4950 J233 T840 DPRZ LT80	595	595	82	4910	38,9	126	80+	4000	3,0
RK-EU-PA09 1x2600 J229 T840 MPRZ LT92	595	595	82	2584	17,1	151	80+	4000	3,0
RK-EU-PA09 1x3250 J230 T840 MPRZ LT92	595	595	82	3204	21,2	151	80+	4000	3,0
RK-EU-PA09 1x3850 J231 T840 MPRZ LT92	595	595	82	3811	25,4	150	80+	4000	3,0
RK-EU-PA09 1x4400 J232 T840 MPRZ LT92	595	595	82	4366	29,7	147	80+	4000	3,0
RK-EU-PA09 1x5500 J233 T840 MPRZ LT92	595	595	82	5456	38,9	140	80+	4000	3,0

*Tolerance range for optical and electrical data: -10%. Values apply to an ambient temperature of 25°C. RIKADA is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification

OPTIONS AVAILABLE ON REQUEST:


LED	REFLECTOR AND OPTICS	CONTROL GEAR	EMERGENCY	CONNECTION	OTHER	COLOUR
T830	DPRZ LT80	DALI	EM3	WIE3	INSERT	RAL
T840	MPRZ LT92	EAIRB-M ^{1 2 3 4}	EM3A	WIE5		
	OP TP(a)	EAIRB-S ^{3 4}	EM3D	WIE5D		
		BLT		2WIE3		
		COR		Schuko-1.5m		
		COR1min		Schuko-3.0m		
		COR30min				

- 1 EAIRB-M option is only available with option INSERT
- 2 For option EAIRB-M ingress protection IP20
- 3 Max system size 1x EAIRB-M + 3x EAIRB-S
- 4 Max wire length from EAIRB-M to last EAIRB-S - 11 m
- 5 PIR option is only available with option INSERT

INSERT option



DPRZ LT80



MPRZ LT92

