

RK-EU-SPT14

Spotlights




DESCRIPTION: **Suspended LED spotlight**
Light distribution type: direct
Optical system: faceted aluminium reflector, clear PMMA diffuser
Housing: aluminium
Colour: black, RAL9005S; white, RAL9003S

GENERAL DATA: **Mains voltage:** 220-240V, 0/50-60Hz
LED lifetime, h: 60000/L80B10
SDCM: 3
Protection class IEC: I
Ingress protection code: IP20
Mechanical impact resistance: IK02
Operating temperature range, °C: ta 0...+35

INSTALLATION: Suspended (cap and cable included). Cable, 1.5m, 3x0.75mm²

ENVIRONMENT: Indoor

APPLICATION: Hotel, retail, showroom, exhibition, public place

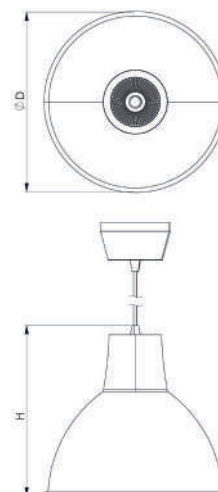

PRODUCT	DIAMETER, mm	HEIGHT, mm	LUMINAIRE OUTPUT*, lm	SYSTEM POWER*, W	SYSTEM EFFICACY*, lm/W	CRI	CCT*, K	WEIGHT, kg
RK-EU-SPT14 x1500 J216 T840 R60 RAL9005	315	300	1459	13,4	109	80+	4000	1,3
RK-EU-SPT14 x2000 J217 T840 R60 RAL9005	315	300	1983	19,5	102	80+	4000	1,3
RK-EU-SPT14 x2700 J218 T840 R60 RAL9005	315	300	2669	27,1	98	80+	4000	1,3
RK-EU-SPT14 x3350 J219 T840 R60 RAL9005	315	300	3348	35,1	95	80+	4000	1,3
RK-EU-SPT14 x3850 J220 T840 R60 RAL9005	315	300	3824	42,1	91	80+	4000	1,3

*Tolerance range for optical and electrical data: -10%. Values apply to an ambient temperature of 25°C. RIKADA is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification

OPTIONS AVAILABLE ON REQUEST:

LED	REFLECTOR AND OPTICS	CONTROL GEAR	CONNECTION	COLOUR
T830	R15	DALI ¹	TRACK ²	RAL
T840	R24		TRACK N m ³	
T930	R32			
T940	R60			
T820 MEAT				
T831 MEAT&WHITE				
T825 BREAD				
T930 VEGETABLES				
T932 FASHION				
T931 FASHION&WHITE				
T927 NATURAL				
T930 NATURAL				
T940 NATURAL				

1 Stucchi tracks are not compatible with switch-control dimming

2 With Track option, IEC protection class is II

3 Please specify cable length before placing an order

