

RK-EU-WL08

Wall Lights




DESCRIPTION: Surface mounted LED bulkhead with selectable power and white light color
Light distribution type: direct
Optical system: frosted polycarbonate diffuser, impact resistant
Housing: aluminium
Colour: dark grey, RAL7043

GENERAL DATA: Mains voltage: 220-240V, 50-60Hz
LED lifetime, h: 80000/L80B50
SDCM: 5
Protection class IEC: I
Ingress protection code: IP65
Mechanical impact resistance: IK10
Operating temperature range, °C: ta -30...+45

INSTALLATION: On the wall. Push-in terminal, 3x2x2.5mm²

ENVIRONMENT: Outdoor

APPLICATION: Facade illumination, transport terminal, parking area, fuel station, public space

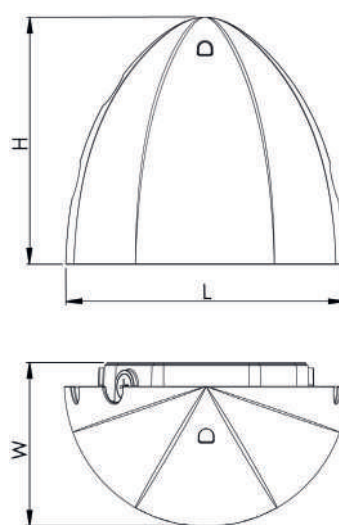

PRODUCT	LENGTH, mm	WIDTH, mm	HEIGHT, mm	LUMINAIRE OUTPUT*, lm	SYSTEM POWER*, W	SYSTEM EFFICACY*, lm/W	CRI	CCT*, K	WEIGHT, kg
RK-EU-WL08 1x 1600/2100/2350/2550/3200 K120 T830/840/850 CLR	238	139	212	1570/2055/2320/2530/3180	13/16/18/20/25	120-140	80+	3000/4000/5000	1,9

*Tolerance range for optical and electrical data: -10%. Values apply to an ambient temperature of 25°C. RIKADA is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification

OPTIONS AVAILABLE ON REQUEST:

LED	CONTROL GEAR	SENSORS	EMERGENCY	CONNECTION	COLOUR
T830	DALI ¹	PCA	EM3 ²	CBF3x1.5-N m ³	RAL
T840			EM3A ³	CBF5x1.5-N m ⁴	
			EM3D ³		
			EM3Atmin-25		

- For DALI option, indicate what output is required
- Operating temperature range for Luminaires with EM option, C: ta 0... +35
- Please specify the length of outgoing cable before placing an order

STANDARD

